

# Commissioning of Energy Upgraded Linac of J-PARC

---

**Kazuo Hasegawa for Linac Group**  
**J-PARC Center/JAEA & KEK**


**The 27<sup>th</sup> Linear Accelerator Conference (LINAC14)**  
**Aug. 31- Sept. 5 2014, Geneva, Switzerland**

## **Outline**

- Purpose of Energy Upgrade**
- Annular-ring Coupled Structure (ACS) as a high- $\beta$  structure**  
**Structure, Mass-production**  
**Installation, High Power Conditioning**  
**Beam Commissioning**
- Next Scope: Beam Current Upgrade**



# Why energy upgrade?

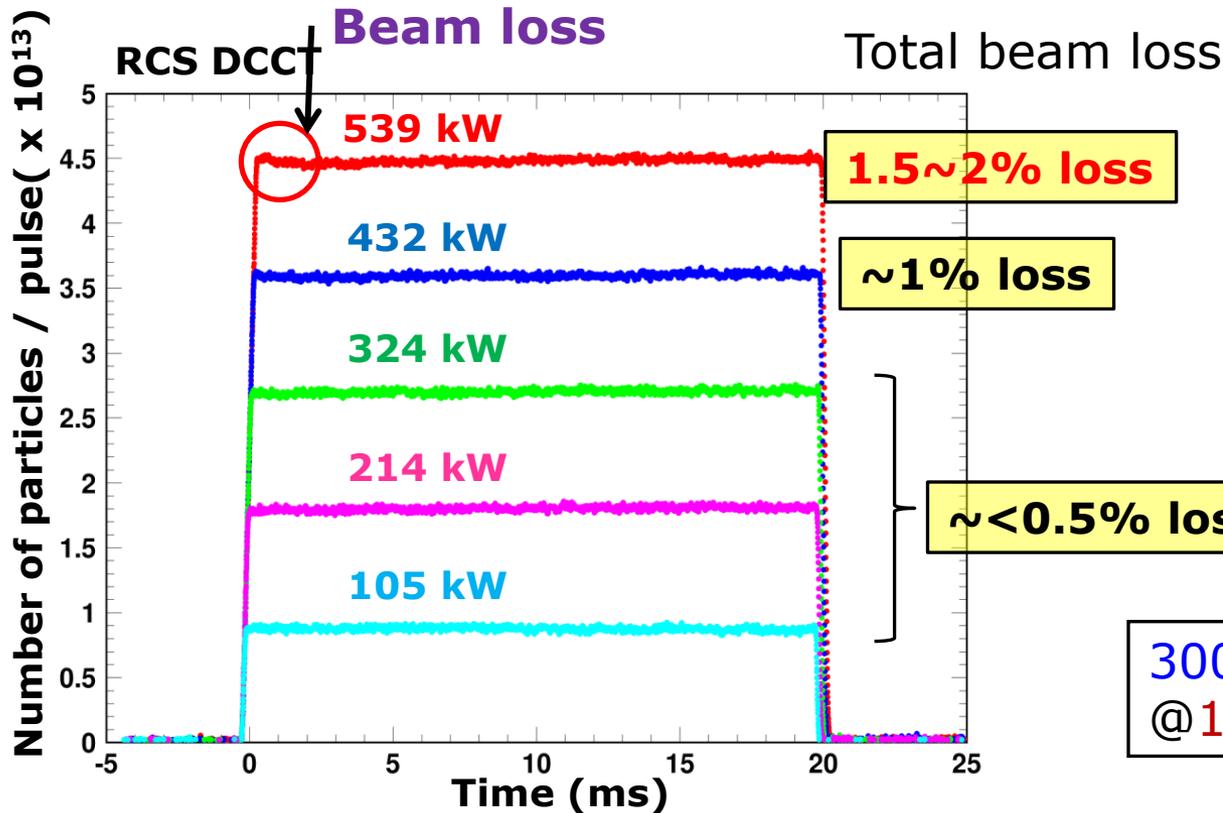

Scaling of Laslett tune shift at injection;

$$\Delta \nu = - \frac{n_t r_p}{2\pi \beta^2 \gamma^3 \epsilon} \frac{1}{B_f}$$

300kW  
@181MeV



1MW  
@400MeV


Equivalent

Beam intensity in the RCS for high power demonstration at 181 MeV injection.

The 400 MeV injection is crucial for 1 MW at RCS to mitigate beam loss due to the space charge effect at the injection.

# Linac: Parameters and Layout


- **Particle:** H<sup>-</sup>
- **Energy:** 400 MeV  
(181 MeV by 2Q/2013)
- **Peak current:** 50 mA (30 mA by 1Q/2014)
- **Repetition:** 25 Hz
- **Pulse width:** 0.5 msec

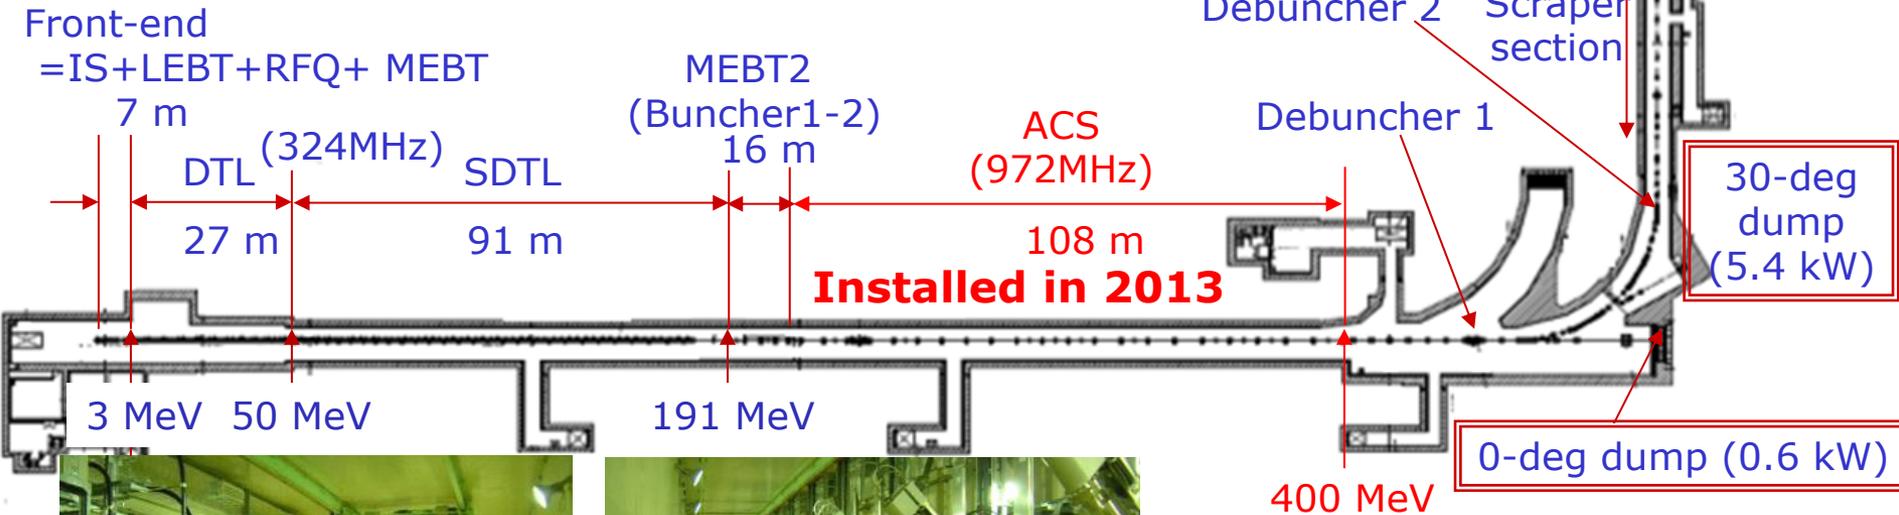

# Annular-ring Coupled Structure (ACS)



The ACS is a kind of coupled cavity linacs (CCLs).

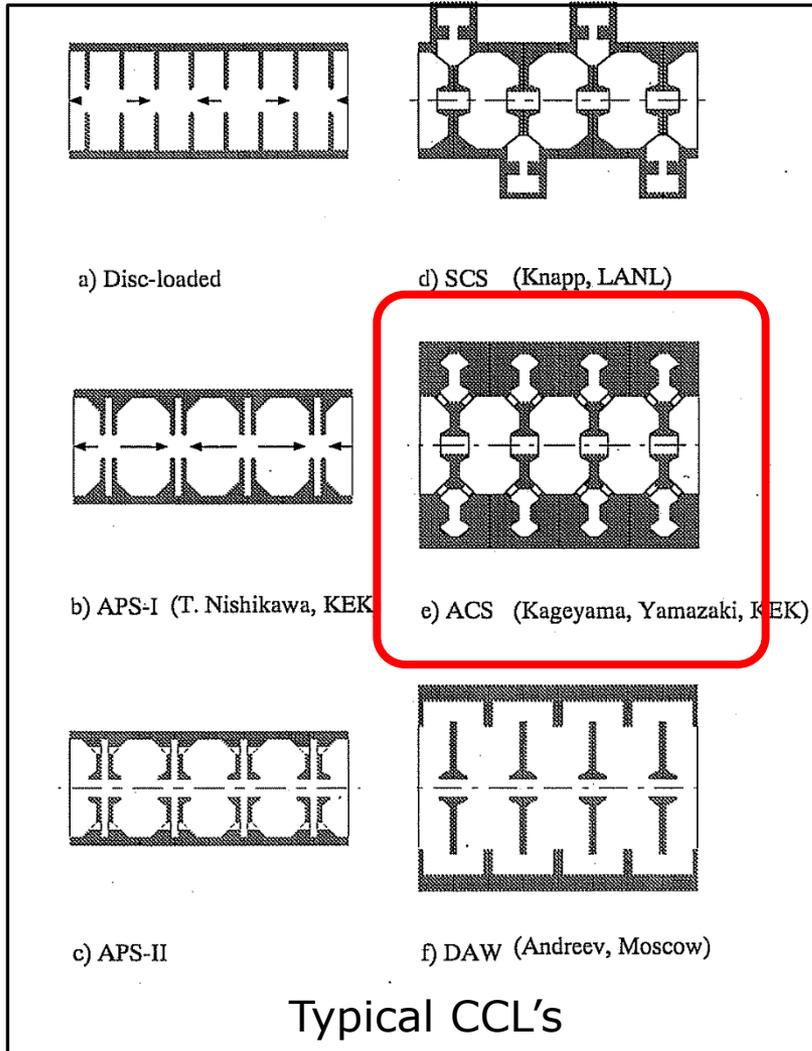


- Axial symmetry realizes following features:
  - ✓ Negligibly small transverse kick field,
  - ✓ Smooth surface with an ultra-precise lathe machining except for coupling slots, and
  - ✓ Mechanical stability.
- The shunt impedance and a coupling factor are comparable to the SCS.
- The ACS well satisfies the J-PARC operation with a duty factor of 3% and can meet 15% operation if requested in the future.


# ACS Structure



ACS "Cell"

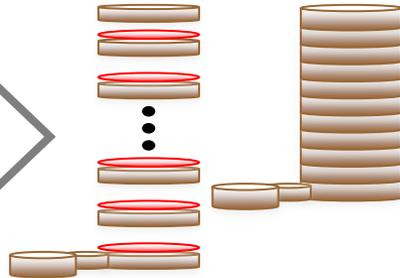


Braze Joint

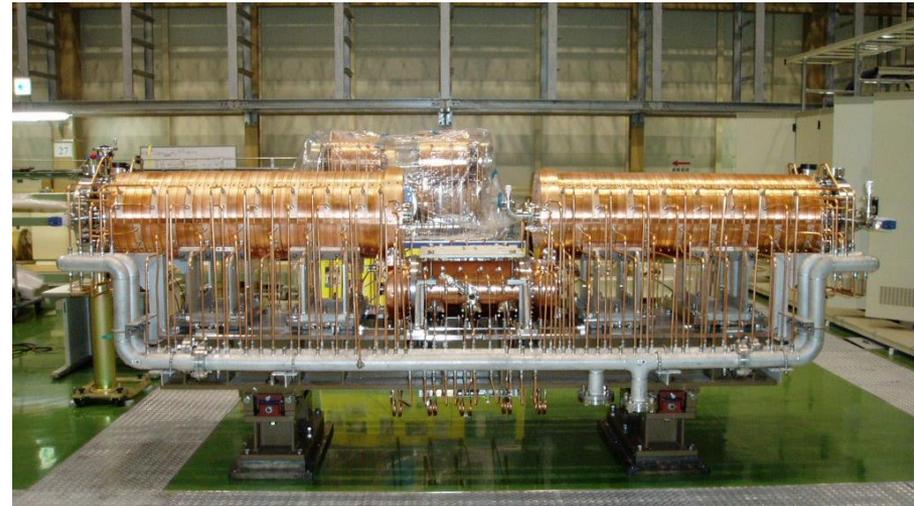

The lowest energy ACS module

## Main parameters of J-PARC ACS

Energy	190.8-400	MeV
Frequency	972	MHz
Section Length	108.3	m
E0	4.1	MV/m
RF pulse length	0.6	ms
Duty factor	3	% max
Number of modules	21	Acceleration
	2	Bunchers
	2	Debunchers

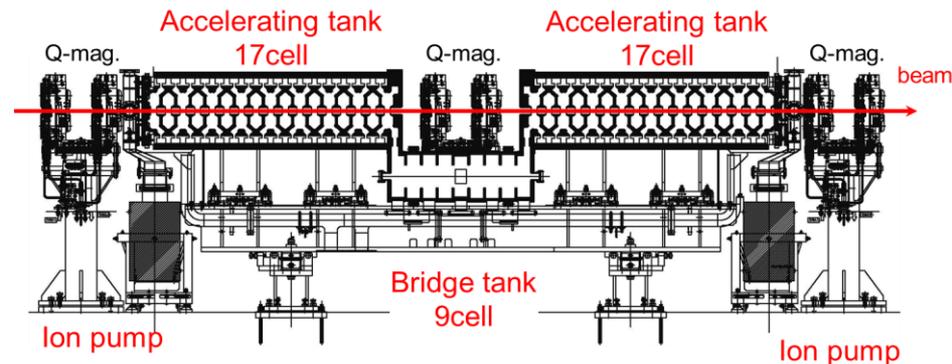

ACS Accelerating module

# Issues of Mass Production



21 ACS modules of mass production started in March 2009.

->It was supposed to be **finished in 3 years**.

- Cell machining : **1400 disks**, and **sizes are different by modules as  $\beta$  changes** (**proton accelerator**) -> **21 kinds**
- Brazing : **42 batches** for accelerating tanks only  
-> **Takes full 1 year**.

## Strategies

- ✓ Systematic measurements by Test cells ->Cell sizes are fixed for all modules as a function of  $\beta$ : in half year  
-> Only one fine frequency tuning step (instead of 2 or 3)
- ✓ Simplify the cell slot machining
- ✓ Parallel fabrications: bridge couplers, RF windows, waveguides, etc.

# Simplification of Coupling Slot Machining




## Prototype Slot

5-axis processing machine

Smooth connection between surfaces

Machining time:  
3h20m/slot  
Too long for mass production

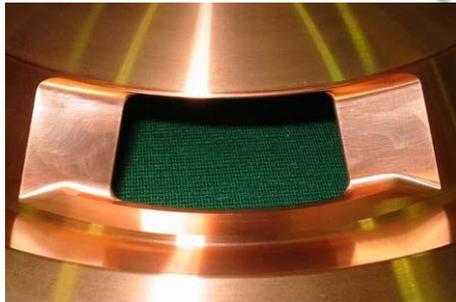


## Mass-produced Slot

Movement of a tool: XYZ and rotation

Machining time  
46min/slot  
(1/5 of prototype)

Shorter machining programming time

Easy to take care of several vendors

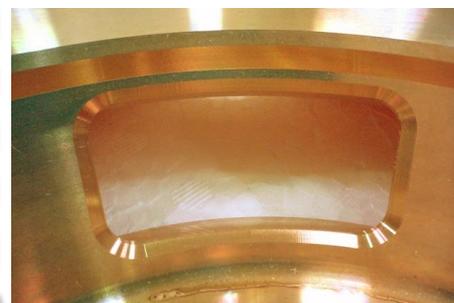


Confirmed the performance of the RF properties by a high power model, then, adopted in the mass production.


# Time Reduction in the Mass Production

Requirement: 21 ACS modules in three years


Schematic schedule for one ACS module fabrication

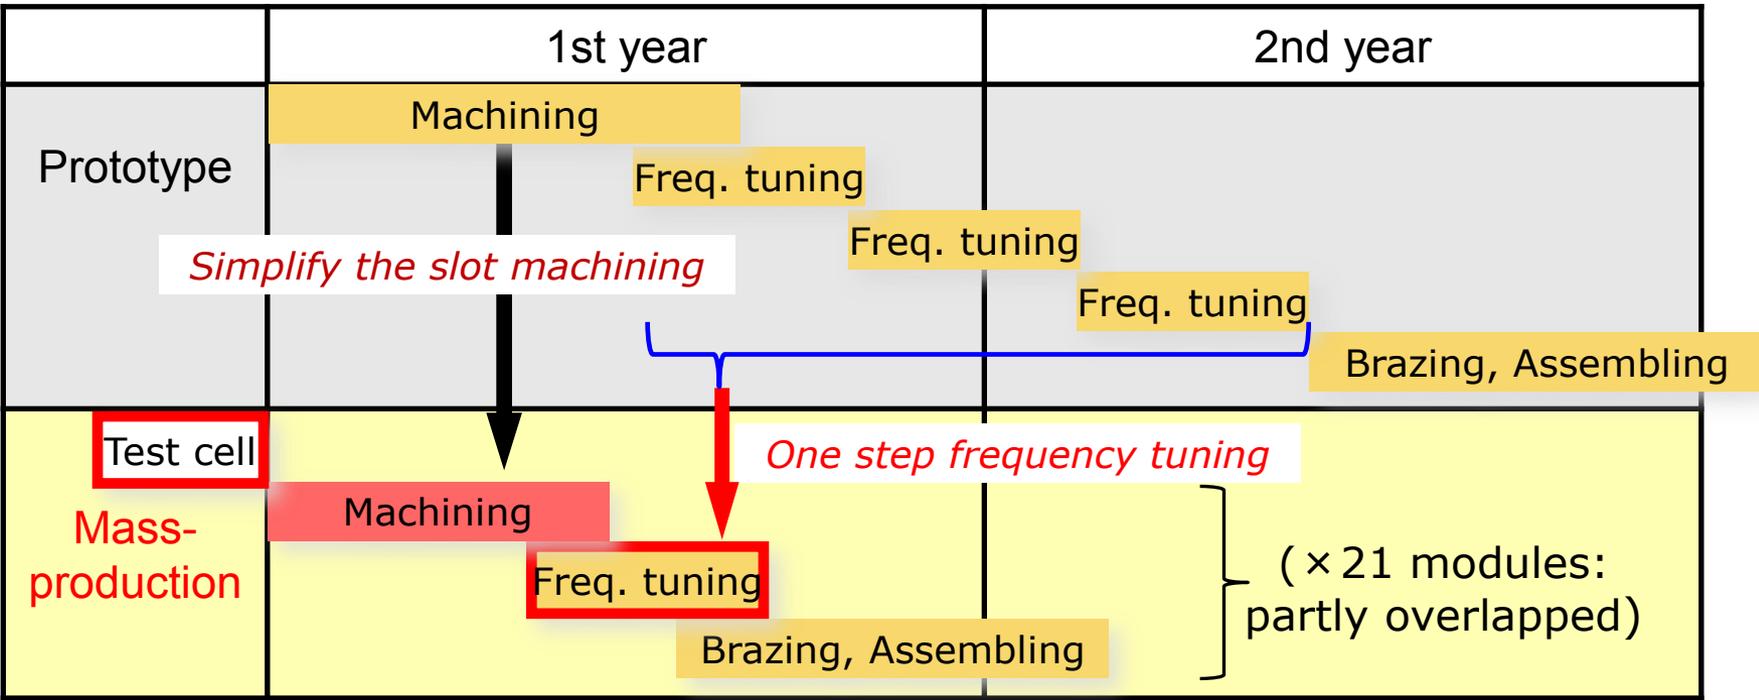


**Test cell:** Obtain coefficients (frequency sensitivity with machining depth) systematically throughout the  $\beta$  range.

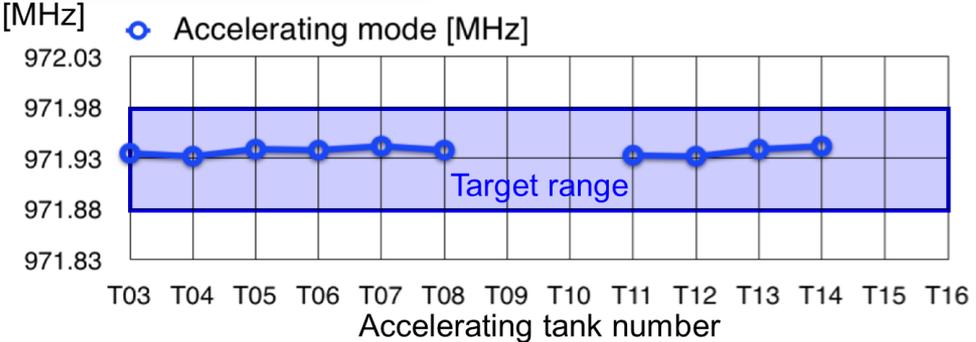

# Installation into the Tunnel

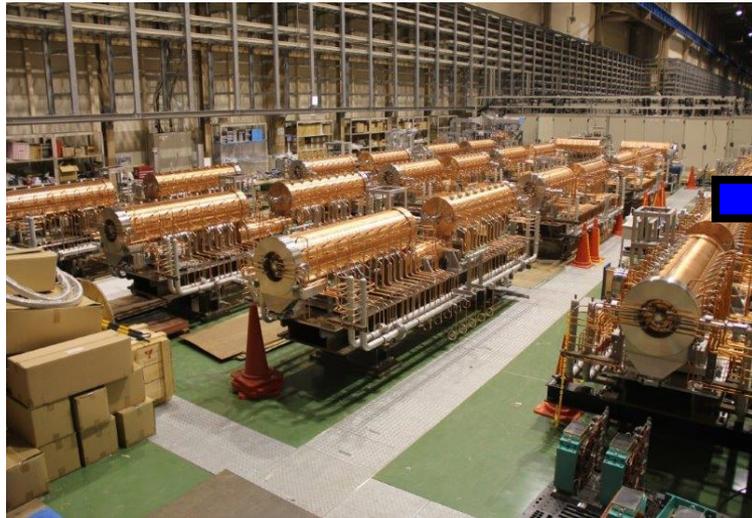

Storage area

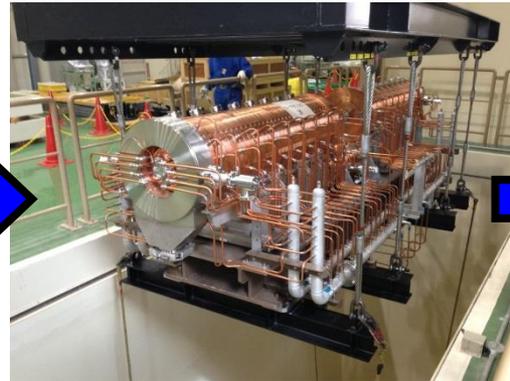

Lift down to tunnel (-13m)



Move by motor drive roller



Shift to beam line





Set on the beam line

Installation and positioning  
**1 module / day**  
 -> approx. 1 month

2013						2014	
7	8	9	10	11	12	1	2
		Installation, positioning					
		Vacuum, beam line connection					
		Cabling, cooling water piping					

# Installation into the Tunnel

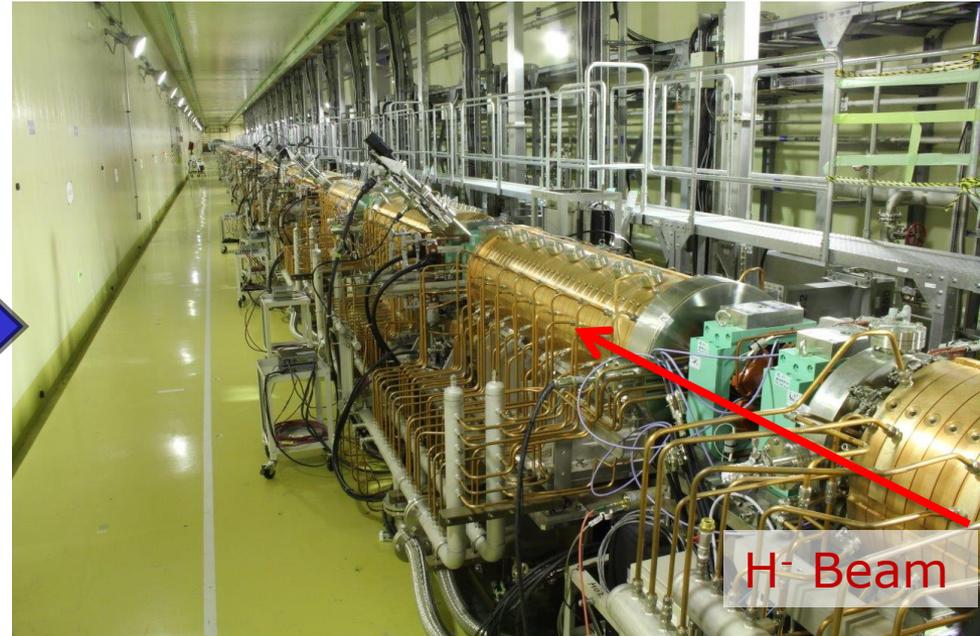

Before installation:  
Just beam transport line.

Finished installation after 3 months  
work: Stuffed with ACS.



2013						2014	
7	8	9	10	11	12	1	2
		Installation, positioning					
		Vacuum, beam line connection					
		Cabling, cooling water piping					

# ACS High Power Conditioning



## ● Typical conditioning history

- In the first step, we put short pulse RF (50  $\mu\text{s}$ ) up to 2 MW.
- Then we put long pulse RF (600  $\mu\text{s}$ ) up to 2MW.

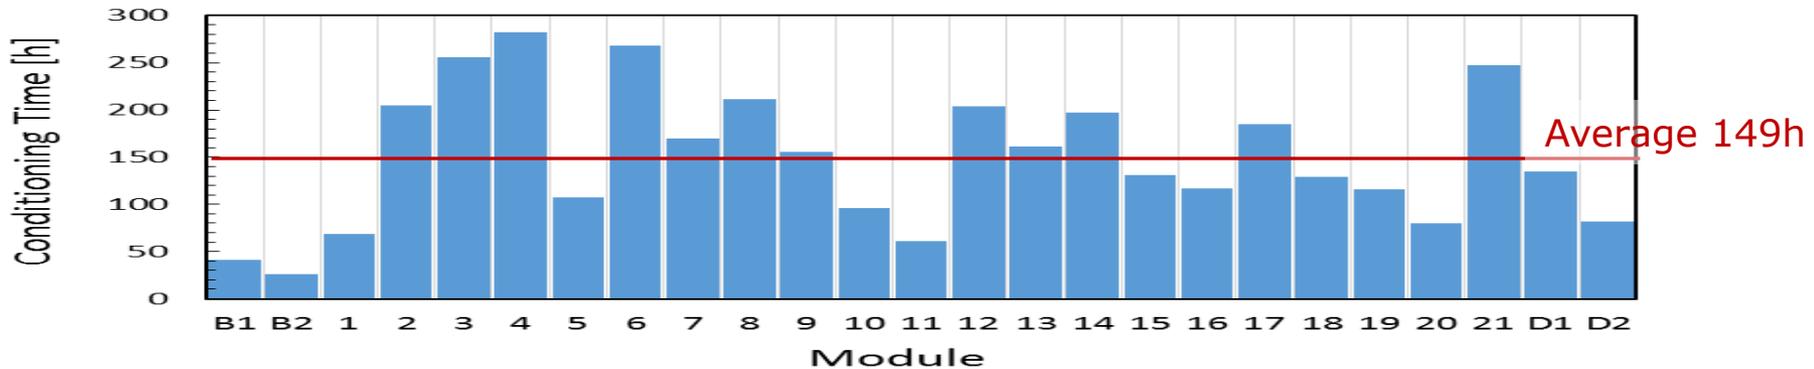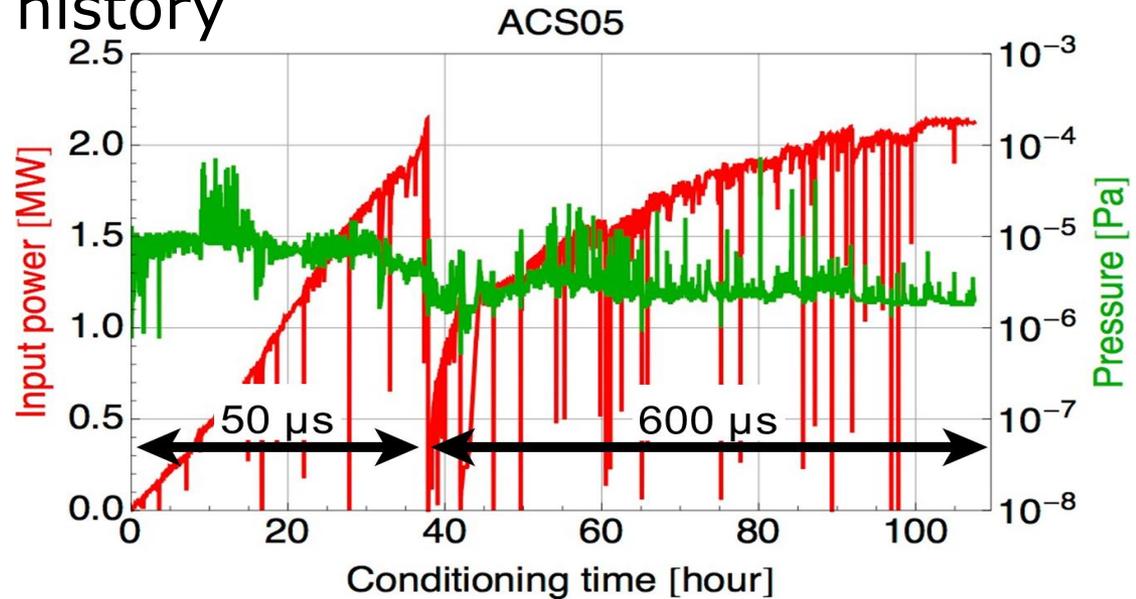

Conditioning time for ACS modules (Note: Required power levels for Bunchers (B1, B2) and Debunchers (D1, D2) are lower.)


# Beam Commissioning




## Beam commissioning

- Dec.16 – Dec. 29: Tuning FE to ACS14
- Jan.7 – Jan.9 SDTL matching (ACS conditioning for 6 days)
- Jan. 16: Restart ACS tuning
- **Jan. 17: Achievement of 400 MeV**

Confirmation: Phase scan and 30-deg bending line

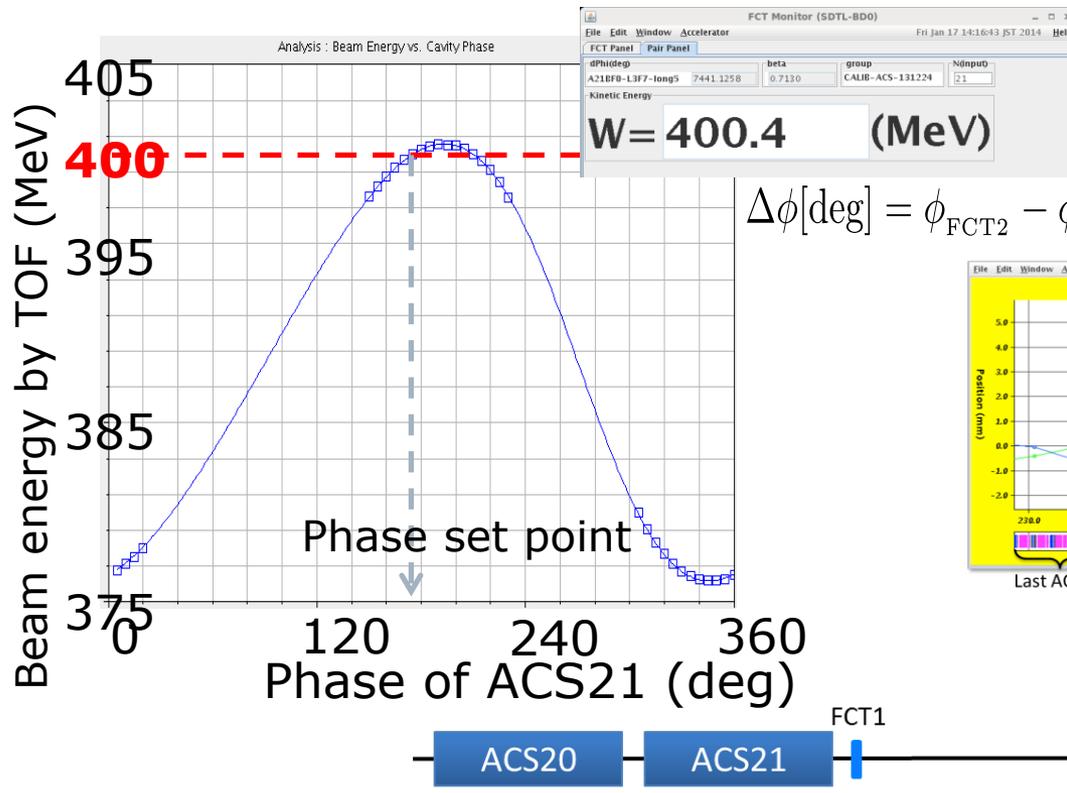

$$\Delta\phi[\text{deg}] = \phi_{\text{FCT2}} - \phi_{\text{FCT1}} + (n \times 360)$$

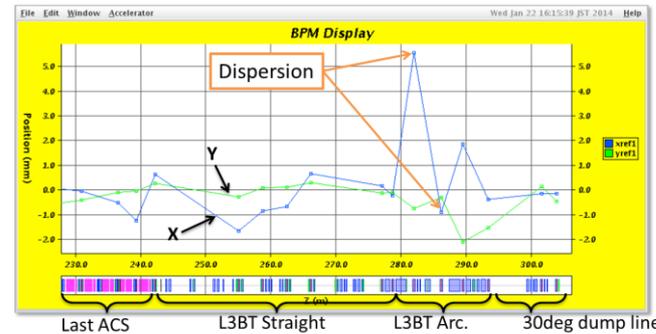

D=0.55m





# Beam Halo Formation at ACS



## ◆ Beam halo formation is observed at ACS

- ✓ The most probable cause is a **longitudinal mismatch** in the ACS section.
  - > Transverse-longitudinal coupling through space charge
  - > Emittance growth
- ✓ Longitudinal matching with “**Bunch Shape Monitors (BSM)**” is needed. We have 3 BSMs: observed vacuum pressure deterioration
  - > Off-line baking

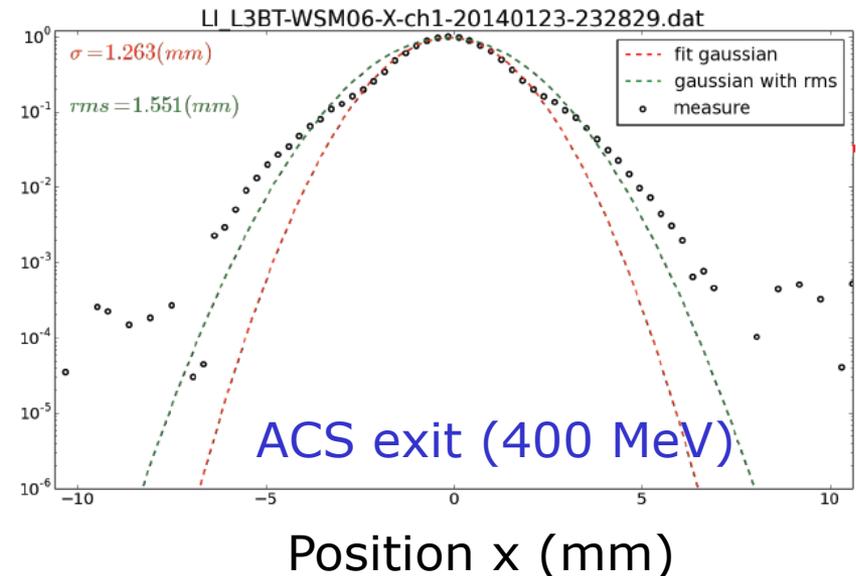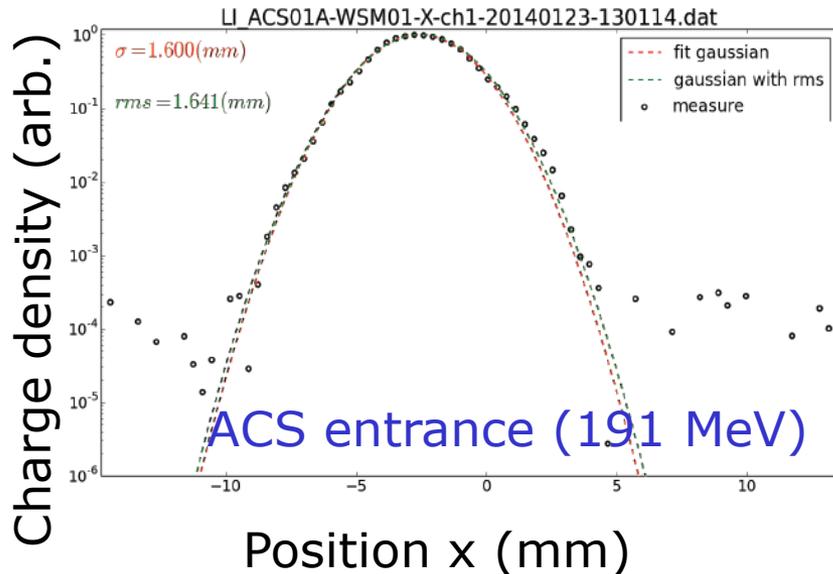


Beam profile before and after the ACS ( $I_{peak} = 25$  mA)

# Advantages of Energy Upgrade



Beam survival rate at the RCS for two injection energies:

- $E_{inj}=181$  MeV, 539 kW-eq. intensity (Run#44, Nov. 2012)
- $E_{inj}=400$  MeV, 553 kW-eq. intensity (Run#54, Apr. 2014)

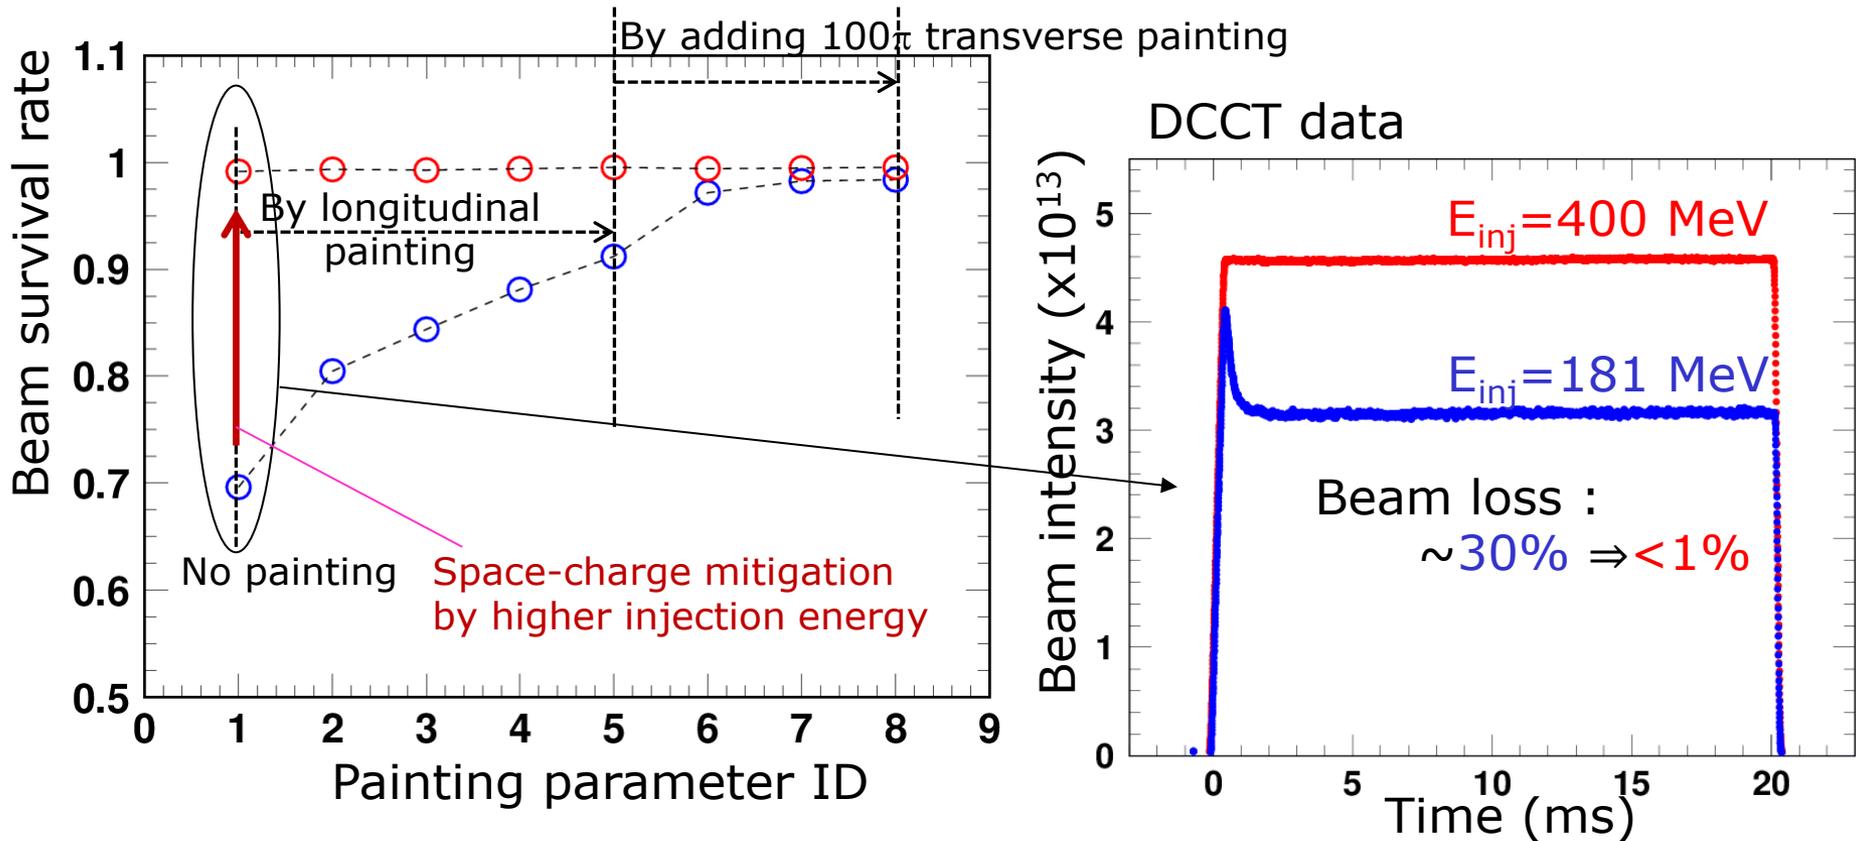


✓ These experimental data clearly show **big advantages of the injection energy upgrade** and **the excellent ability of injection painting**.

# Beam Power to MLF (3GeV)



Beam Current Upgrade

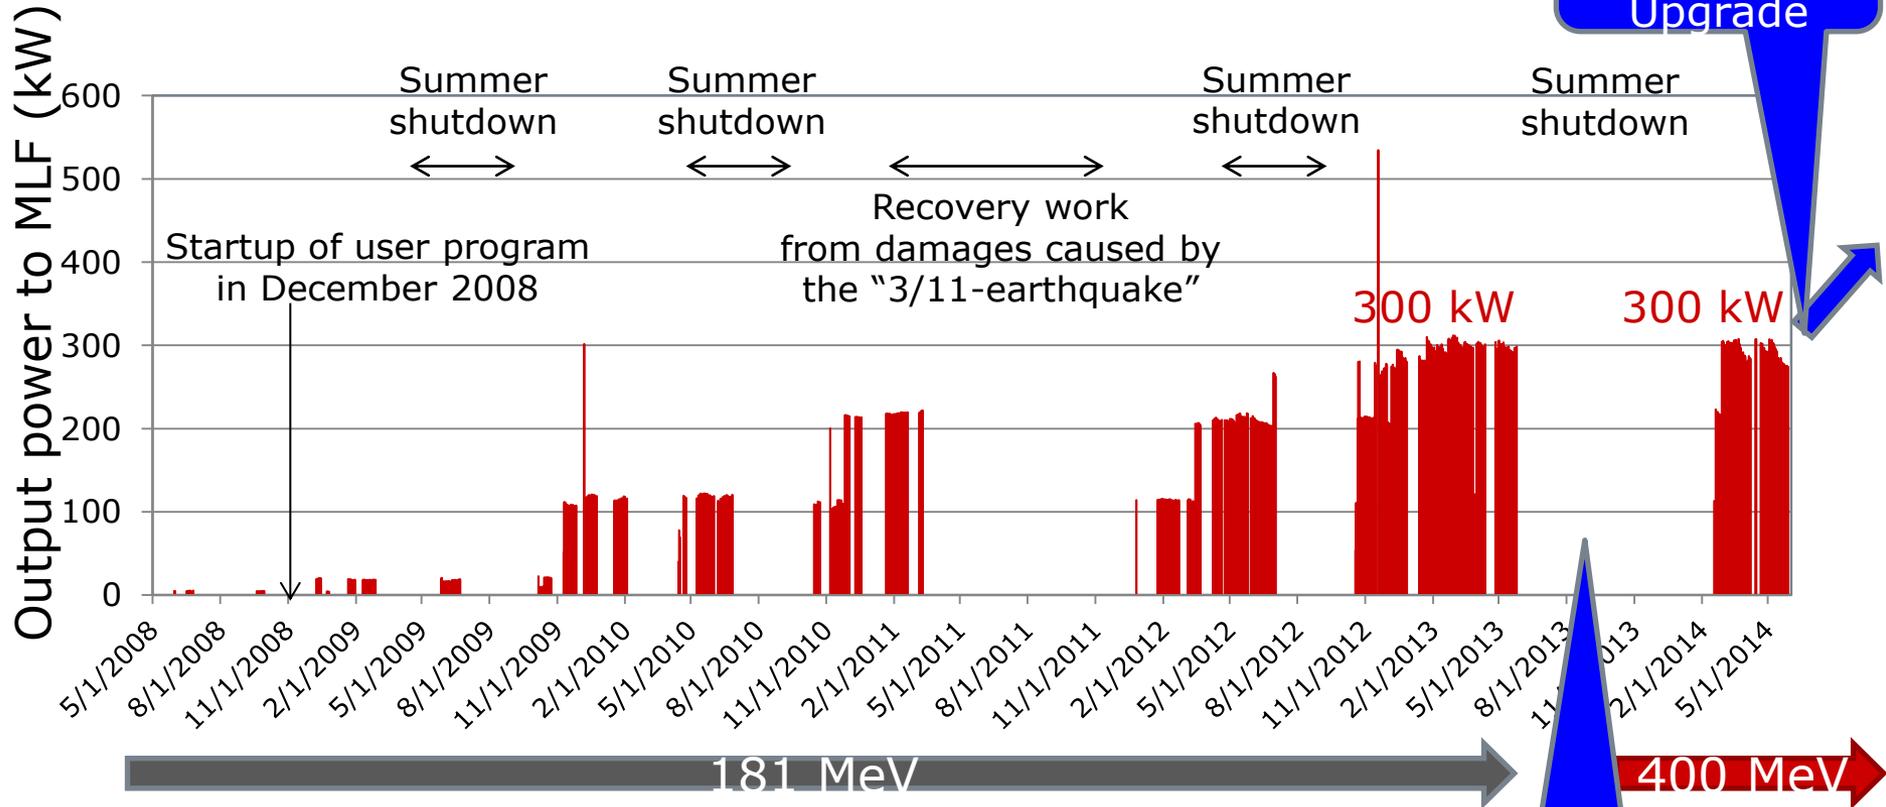

3 GeV Beam power from the RCS to the MLF:

Steadily increased up to 300kW


-> Linac power 18kW@181MeV, 40kW@400MeV

Energy Upgrade

# Front End: IS and RFQ (30 -> 50 mA)




## Ion source

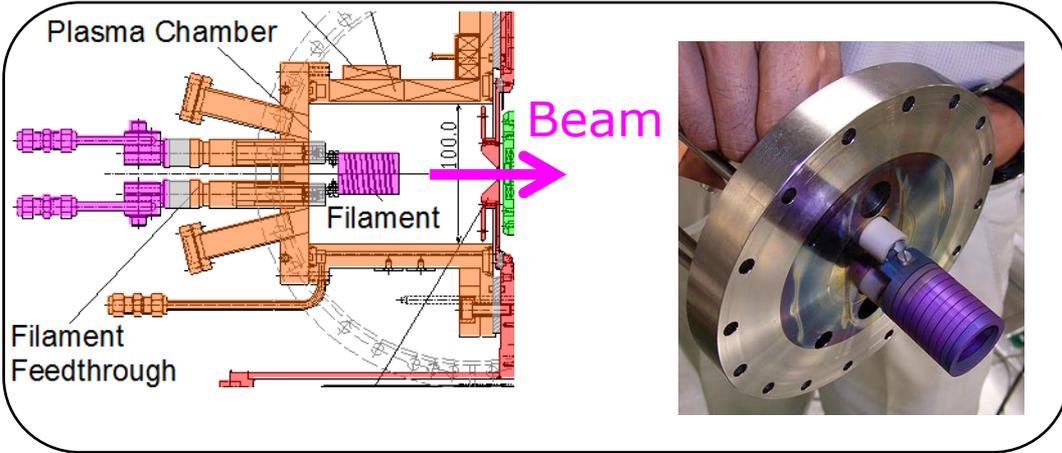


New



- Filament -> RF-driven
- Cs free -> Cs seeded

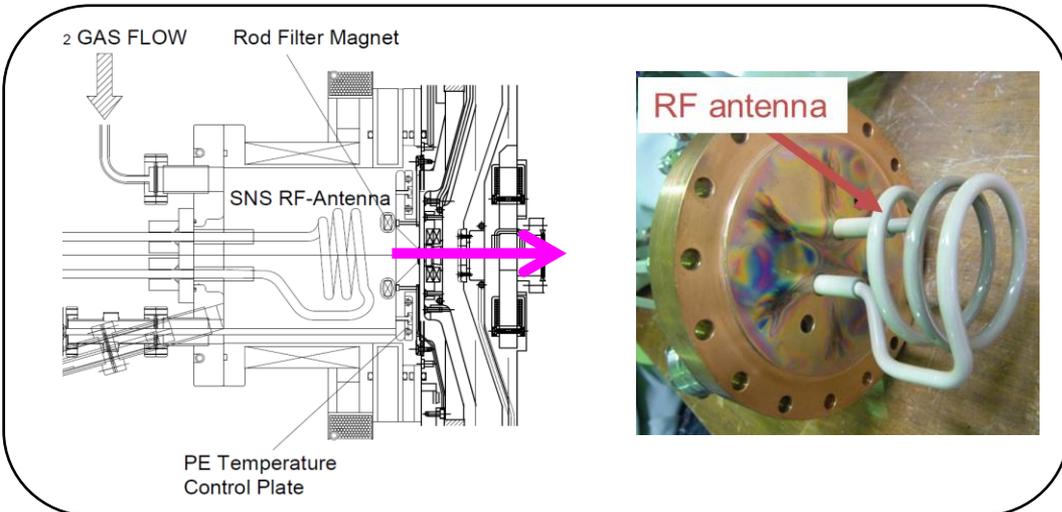


## RFQ

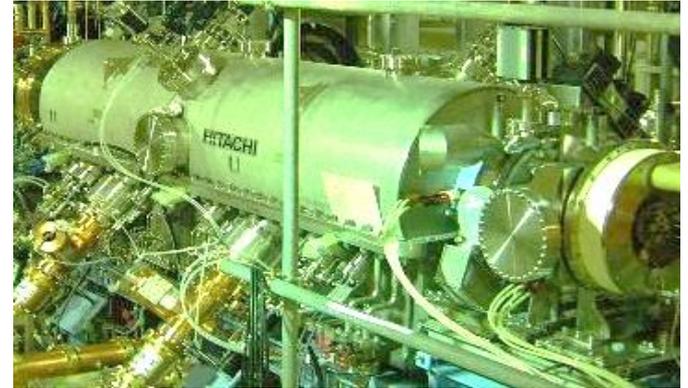


- Structure: Bolt -> Brazed
- Beam dynamics design for higher beam current


New

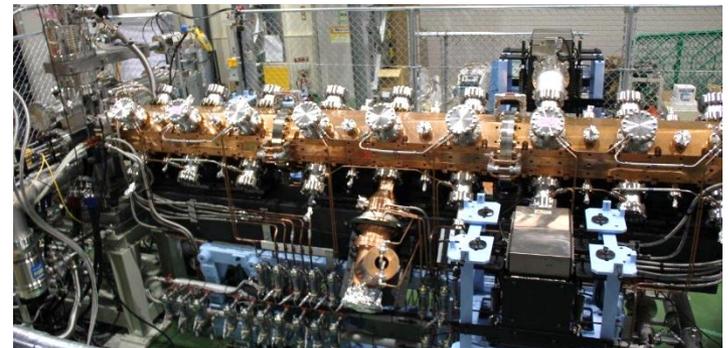

# Installation of New Front-End

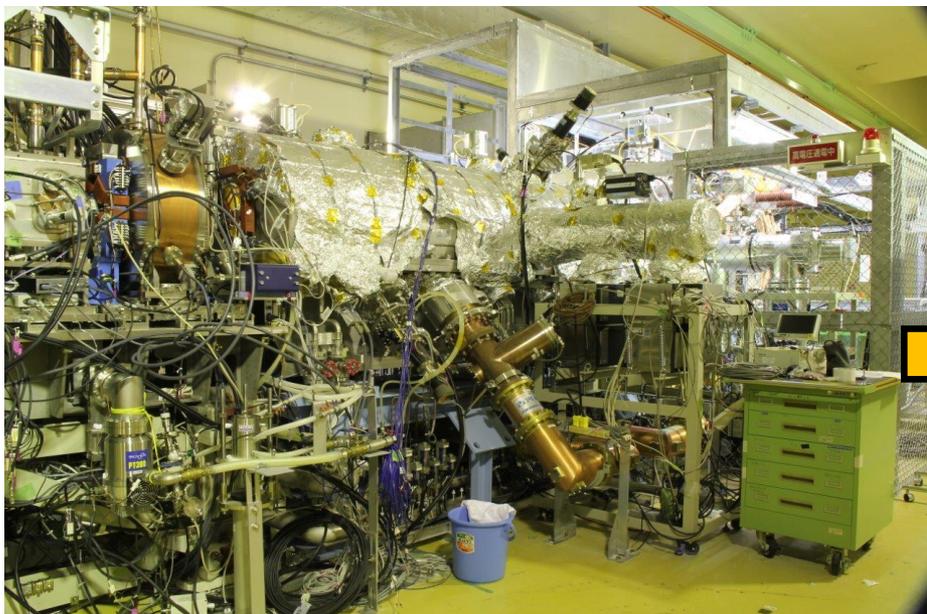


The old RFQ.  
(Ion source in the cage).

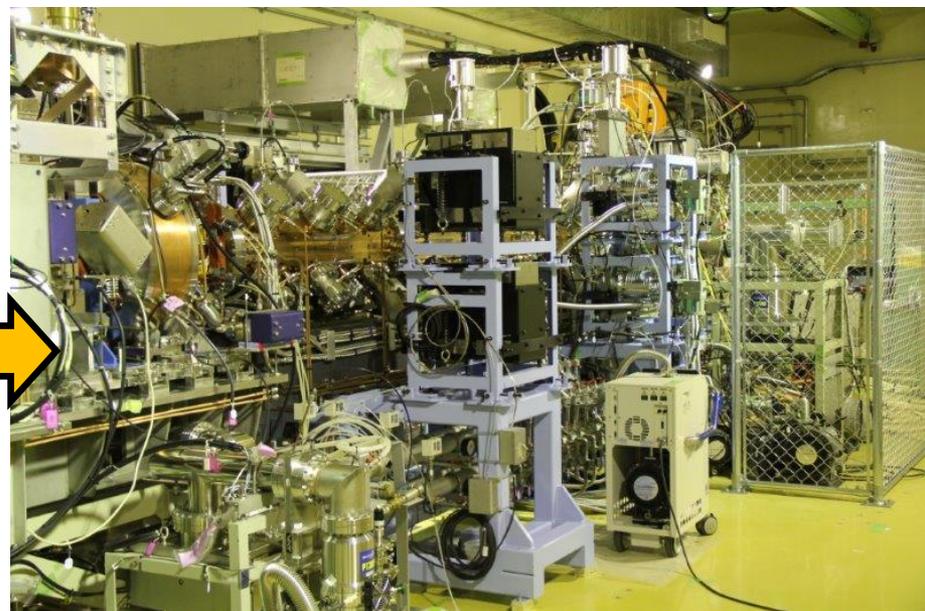

The new RFQ.  
(Aug. 27, 2014)

# Master Schedule

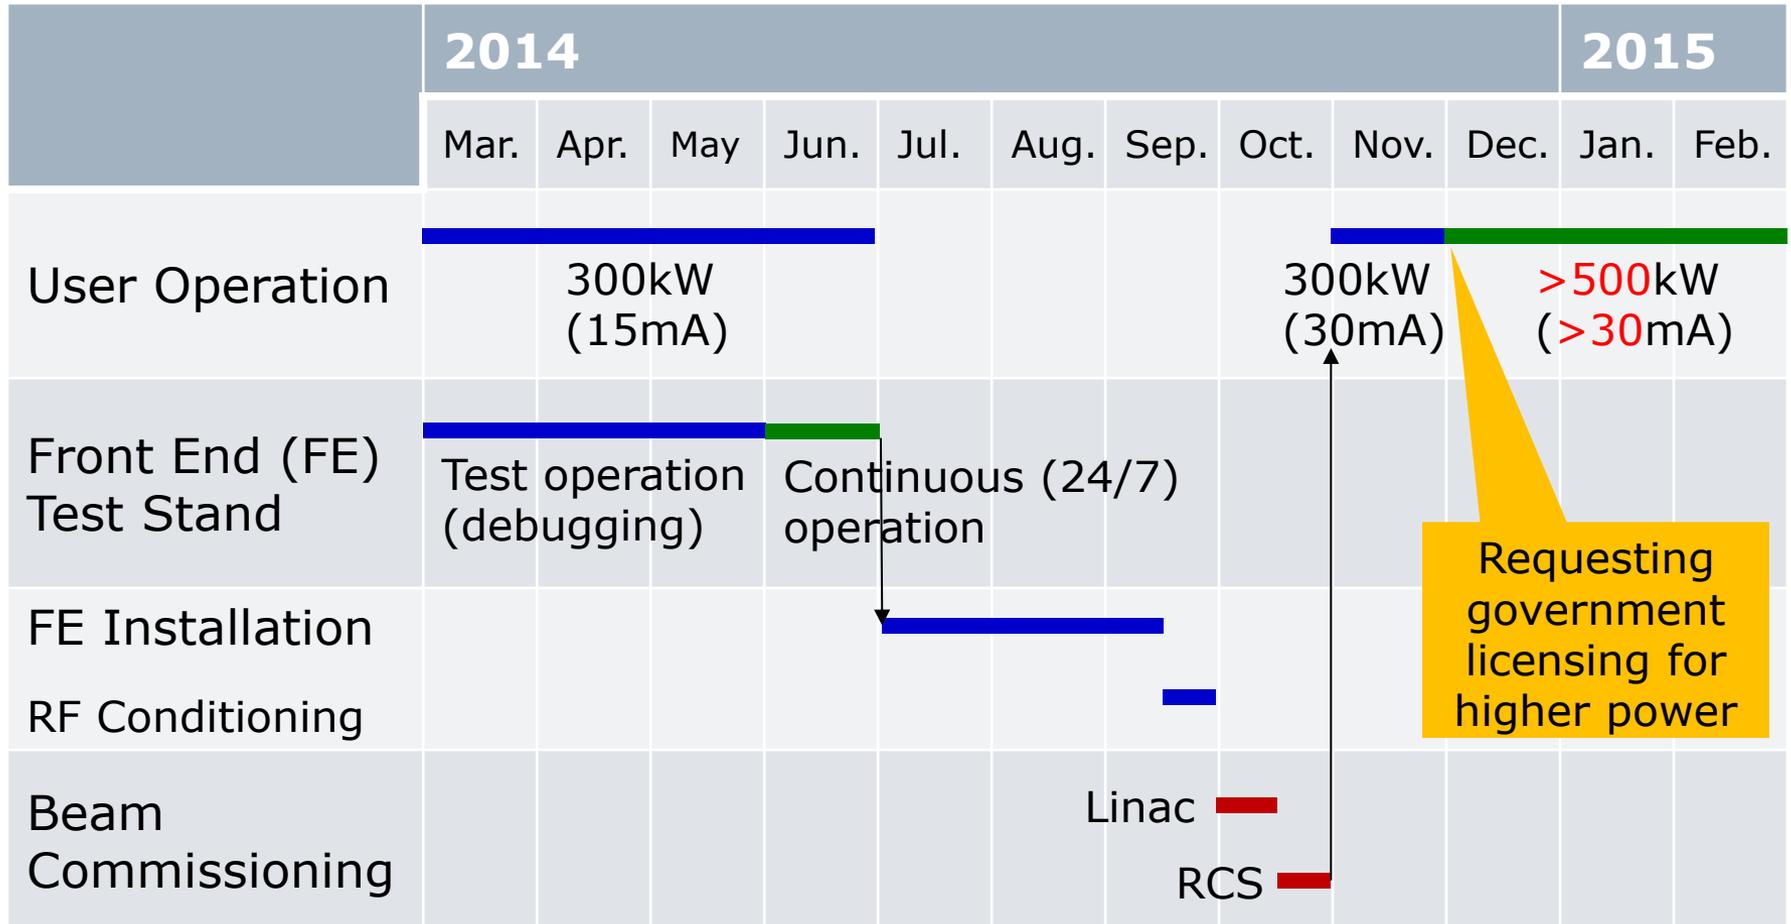

High power demonstration  
 1 MW-eq.@3GeV  
 (50mA@Linac)

# Summary



The energy upgraded 400 MeV linac has been **successfully commissioned** as scheduled from 2013.

- RCS demonstrates **high intensity beam at 550 kW** (equivalent). Confirmed the **advantages of the energy upgrade**.
- Linac and RCS provides **300 kW beam for MLF users**. Corresponding Linac power: 40 kW.
- Remain **several issues** to improve stability and availability.
  - Some hardware issues treated in summer 2014.
  - Need more study (and instruments) for **beam halo, loss and radioactivity**.
- **Beam current upgrade**: installed new Ion Source and RFQ.
  - Beam commissioning in October 2014:  
**Demonstration higher power towards 1 MW.**

# Related Presentations



- **MOPP072** Present Status of J-PARC LINAC LLRF Systems (Z.Fang)
- **MOPP090** Adjustment of the coupling factor of the input coupler of the ACS linac by a capacitive iris in J-PARC (J. Tamura)
- **MOPP091** Beam test of a new RFQ for the J-PARC linac (Y.Kondo)
- **TUPP067** Chopping Operation for the Tandem Scrapers at the J-PARC Linac (K. Futatsukawa)
- **TUPP070** STATUS AND RECENT MODIFICATIONS TO 324-MHZ RF SOURCE IN J-PARC LINAC (M. Kawamura)
- **TUPP072** Studies on wake field in Annular Coupled Structure (Y. Liu)
- **TUPP073, TUPOL05** Study of the ACS cavity without a bridge cavity (F. Naito)
- **TUPP094** Recent Progress of Beam Commissioning at J-PARC Linac (T. Maruta)
- **TUPP095** High-power test results of the RFQ III in J-PARC linac (T. Morishita)
- **THPP073** Cavity Excitation of the Chopping Beam at the J-PARC Linac (K. Futatsukawa)
- **THPP089, THPOL07** High Power Conditioning of Annular-ring Coupled Structures for the J-PARC Linac (H. Ao)
- **THPP090** Longitudinal Measurement of Annular-type Coupled Structure Linac in J-PARC (T. Maruta)
- **THPP091** Installation and Performance Check of Beam Monitors for Energy Upgraded J-PARC Linac (A. Miura)

# Acknowledgements

---



- J-PARC Linac group members and accelerator group members
- Support staff and companies
- This work is achieved with many fields of linac components, and many contributors are involved, not limited to the ACS.  
But special thanks for ACS development to Y. Yamazaki, M. Ikegami, K. Takata, V. Paramonov, S.C. Joshi, N. Hayashizaki, N. Ouchi, etc.

