



New applications of high-gradient RF linacs



High gradient is not only cool but also compact and potentially cheaper



State-of-the art acceleration:

Normal conducting:

28 MV/m SwissFEL

35 MV/m SACLA

Superconducting:

24 MV/m European XFEL

31.5 MV/m ILC

I will talk about the future:

100 MV/m CLIC

60-80 MV/m compact XFELs

50 MV/m low- β proton therapy linacs





Outline



- Introduction
 - Initial motivation for high-gradient acceleration
 - The CLIC R&D towards 100 MV/m acceleration
- New applications
 - Energy upgrade of existing FELs (e.g. FERMI@Elettra, Trieste)
 - Compact hard X-ray FELs (e.g. SINAP, Shanghai)
 - Compton and neutron sources (e.g. University of Tokyo)
 - Proton therapy linacs (e.g. TULIP-2, TERA)
- Conclusions



Outline



- Introduction
 - Initial motivation for high-gradient acceleration
 - The CLIC R&D towards 100 MV/m acceleration
- New applications
 - Energy upgrade of existing FELs (e.g. FERMI@Elettra, Trieste)
 - Compact hard X-ray FELs (e.g. SINAP, Shanghai)
 - Compton and neutron sources (e.g. University of Tokyo)
 - Proton therapy linacs (e.g. TULIP-2, TERA)
- Conclusions



CLIC near CERN



“Linear Collider Studies”, Steinar Stapnes, Monday 9:30, LINAC14

Legend

— CERN existing LHC

Potential underground siting :

●●●● CLIC 500 GeV

●●●● CLIC 1.5 TeV

●●●● CLIC 3 TeV

Jura Mountains


IP

Geneva

Lake Geneva

- For a very long linac optimum accelerating gradient is high.
- It is around 100 MV/m for CLIC 3 TeV main linac
- Vacuum breakdown and peak RF power production are the most important limitations for high gradient
- A significant effort was made to address these two issues


CLIC test structures towards high gradient (2007) T18 → TD18 → T24 → TD24 → TD26CC (2014)

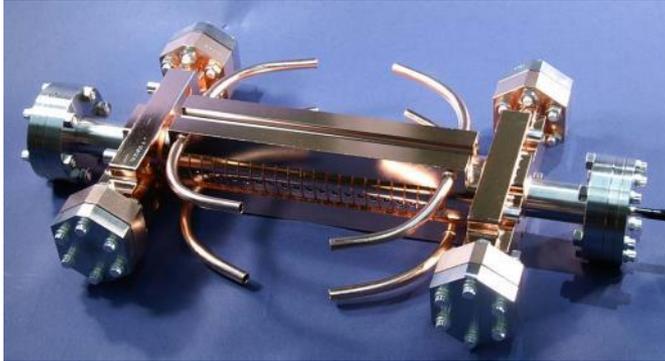


1. T18_Disk_#2



undamped

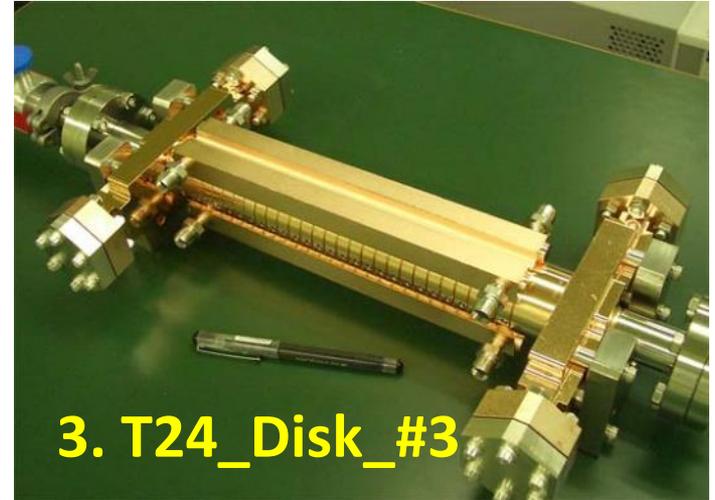

3. T24_Disk_#3

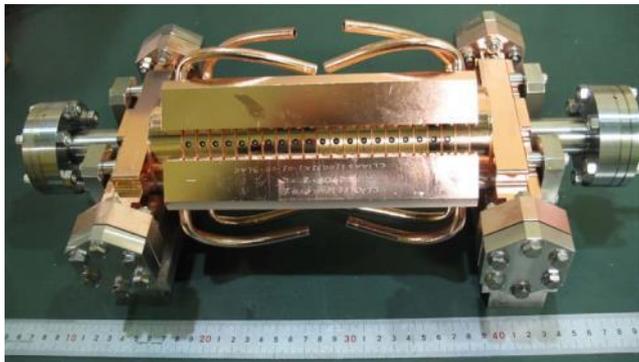

2. TD18_Disk_#2



damped




4. TD24_Disk_#4

5. TD26CC under test now


High gradient testing infrastructure

➤ 11.424 GHz at SLAC and KEK


NLCTA (SLAC)

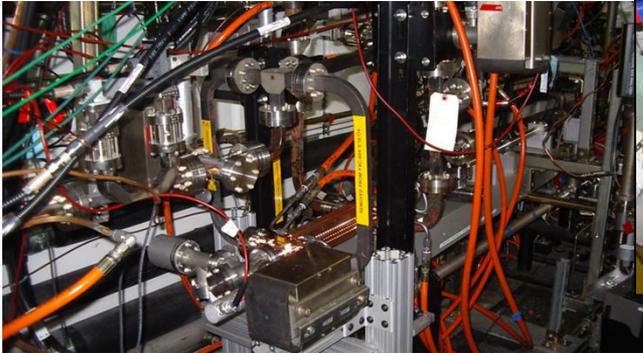

ASTA (SLAC)

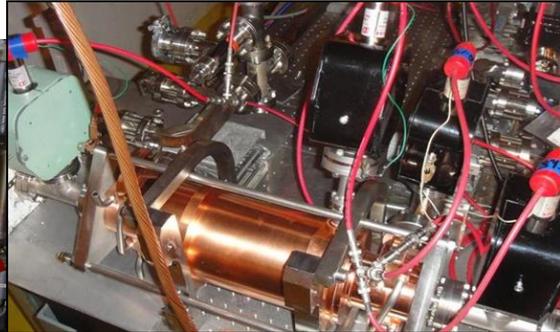

Nextef (KEK)

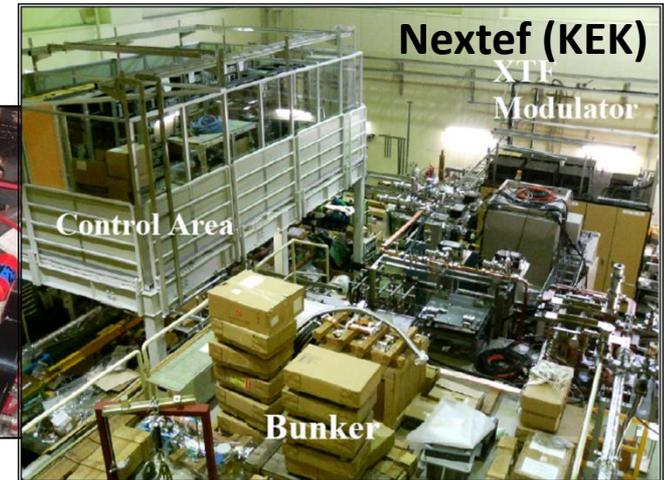

➤ 11.994 GHz at CERN


Xbox1



Xbox2




Xbox3

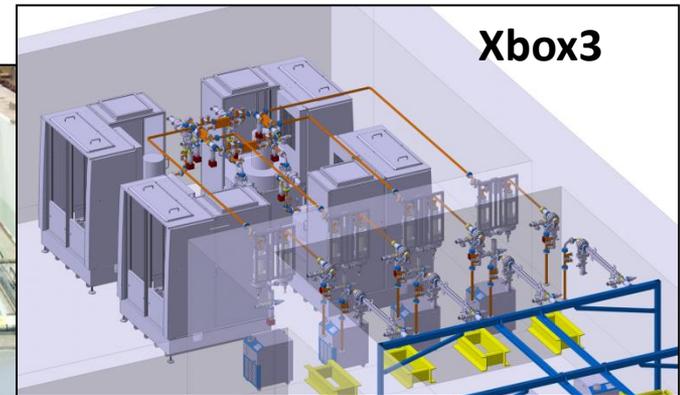

Xbox1 layout



Clockwise from top-left:

- Modulator/klystron (50MW, 1.5us pulse)
- Pulse compressor (250ns, ratio 2.8)
- DUT + connections
- Acc. structure (TD26CC)

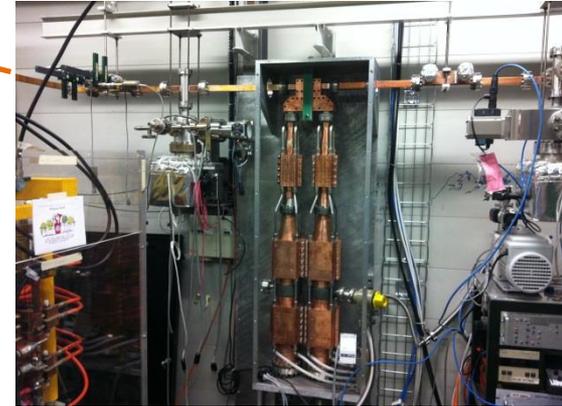

Gallery

.....
Bunker

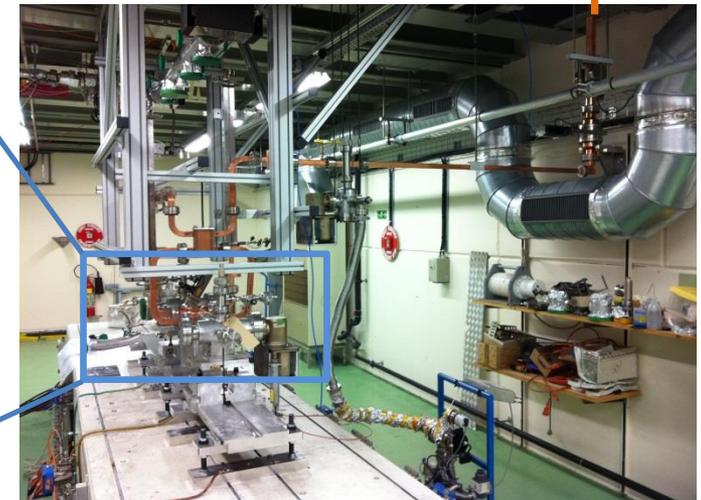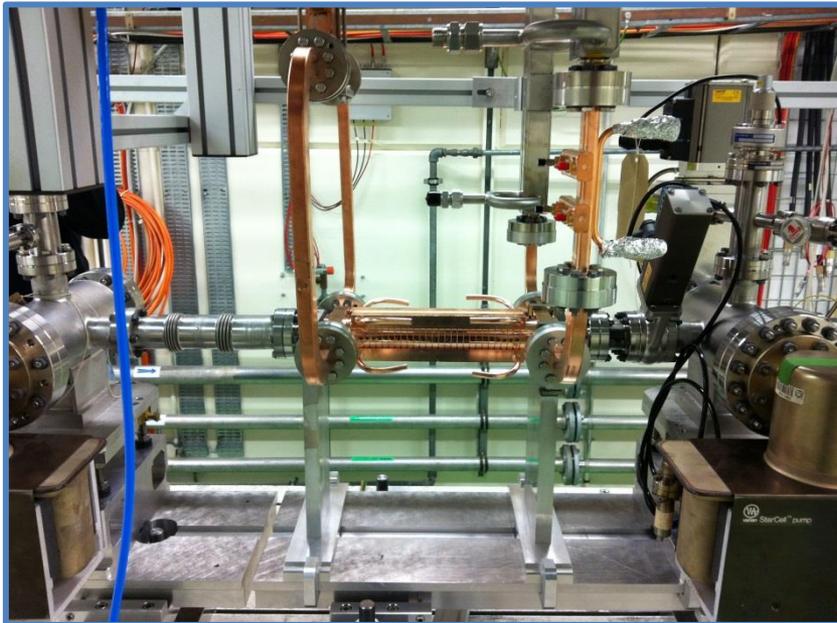



X-band klystrons: High gradient driving force From “fait maison” to production in industry

50 MW
1.5 μ s
50 Hz



SLAC XL-5

6 MW, 5 μ s, 400 Hz



Toshiba E37113*



VKX-8311A

Pulsed klystron operating at 11.994 GHz, 50 MW peak, 5 kW average power. Electromagnet focused, liquid cooled. Waveguide output WR-90, vacuum flange.




CPI VKX-8311A

Tested at Toshiba last week

Now a catalogue item



Accelerating structure performance summary based on testing at SLAC, KEK and CERN

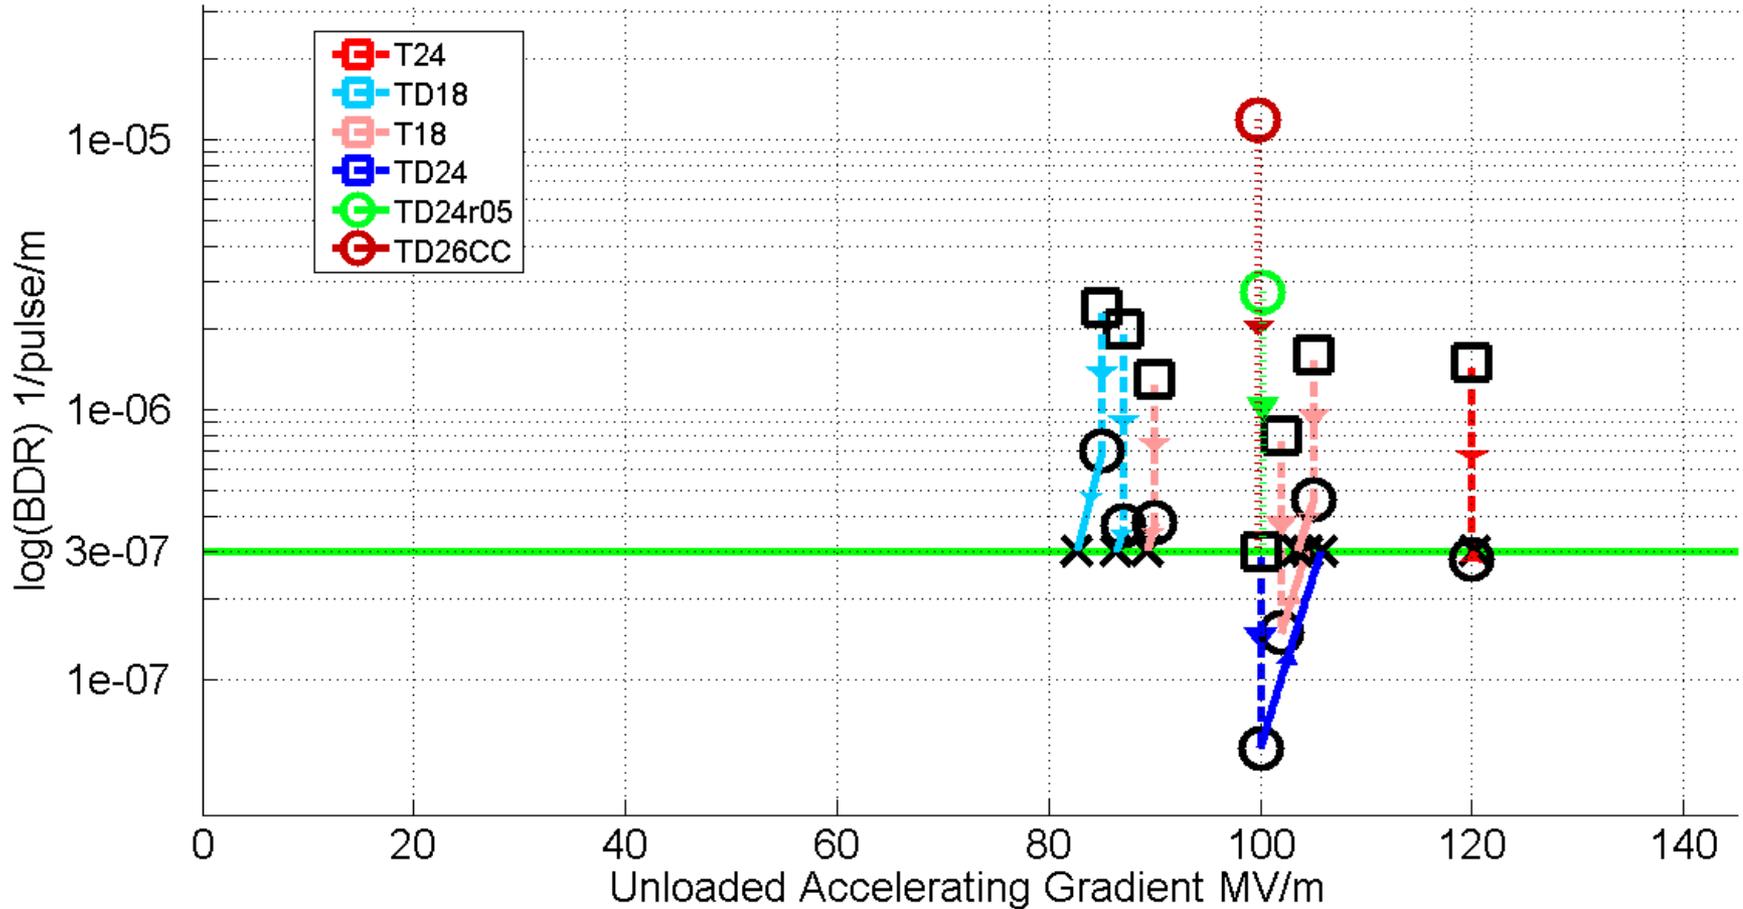

The functions which determine the high-gradient operation of the structures are:

$$\frac{P}{\lambda C} = \text{const}$$

Global power flow


$$S_c = \|\text{Re}(S)\| + \frac{1}{6} \|\text{Im}(S)\|$$

Local modified Poynting vector

$$E_s/E_a$$

$$H_s/E_a$$

$$S_c/E_a^2$$

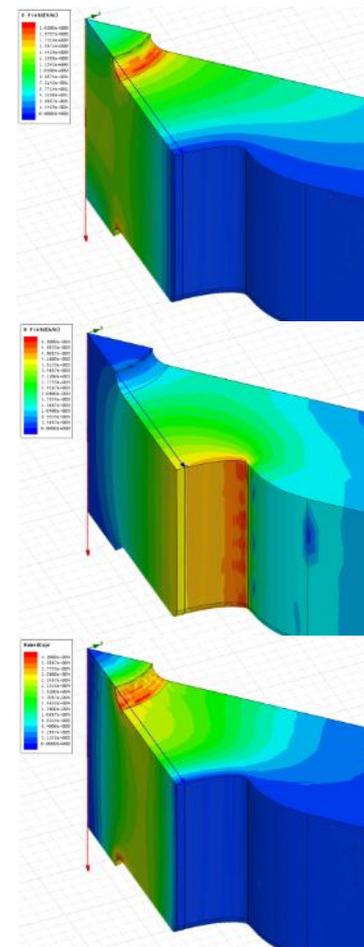

“New local field quantity describing the high gradient limit of accelerating structures”,

A. Grudiev, S. Calatroni, W. Wuensch,

Phys. Rev. ST Accel. Beams **12** (2009) 102001



Outline



- Introduction
 - Initial motivation for high-gradient acceleration
 - The CLIC R&D towards 100 MV/m acceleration
- **New applications**
 - **Energy upgrade of existing FELs (e.g. FERMI@Elettra, Trieste)**
 - Compact hard X-ray FELs (e.g. SINAP, Shanghai)
 - Compton and neutron sources (e.g. University of Tokyo)
 - Proton therapy linacs (e.g. TULIP-2, TERA)
- Conclusions


FERMI@Elettra: present layout and energy upgrade



More details in MOPP023

FERMI current layout and performance

- E_{beam} up to 1.5 GeV
- FEL-1 at 80-10 nm and FEL-2 at 10-4 nm
- Long e-beam pulse (up to 700 fs), with “fresh bunch technique”

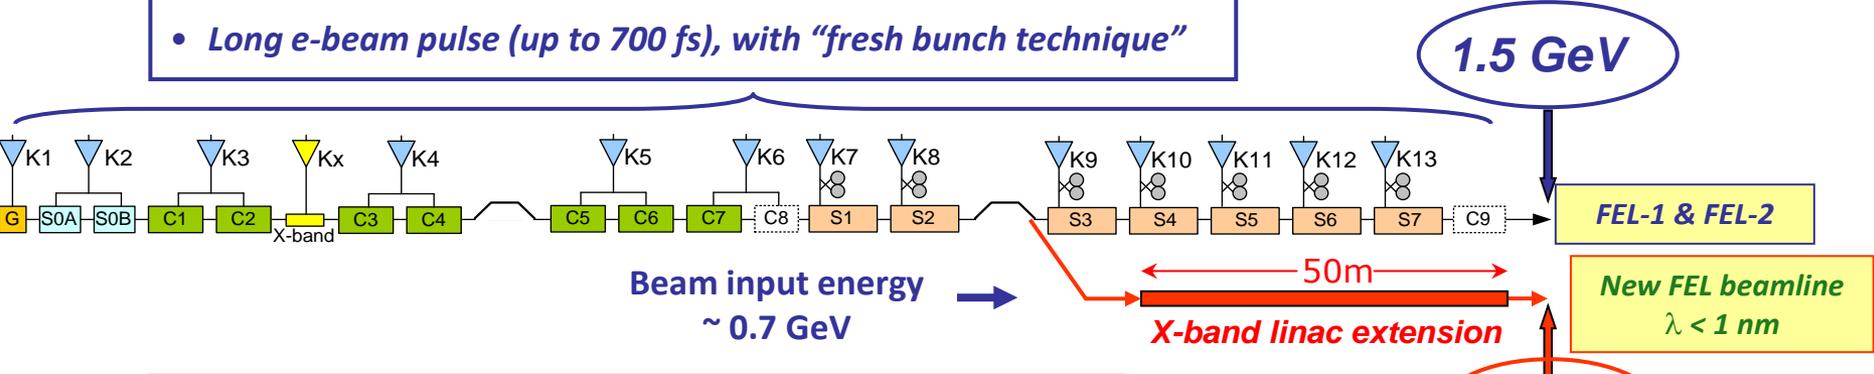

High gradient X-band linac extension

- Active accelerating length **40 m**
- Accelerating gradient **70 MV/m**
- Beam energy gain **2.8 GeV**
- Injection energy **0.7 GeV**

New FEL beamline expected performance	
Undulator period	30 mm
Undulator parameter	1
Fundamental wavelength	0.5 nm
Peak power at saturation	5.6 GW

N.B. The new layout could also provide two electron beams at the same time (@25 Hz) with different energies




Outline




- Introduction
 - Initial motivation for high-gradient acceleration
 - The CLIC R&D towards 100 MV/m acceleration
- **New applications**
 - Energy upgrade of existing FELs (e.g. FERMI@Elettra, Trieste)
 - **Compact hard X-ray FELs (e.g. SINAP, Shanghai)**
 - Compton and neutron sources (e.g. University of Tokyo)
 - Proton therapy linacs (e.g. TULIP-2, TERA)
- Conclusions

Shanghai Photon Science Center at SINAP


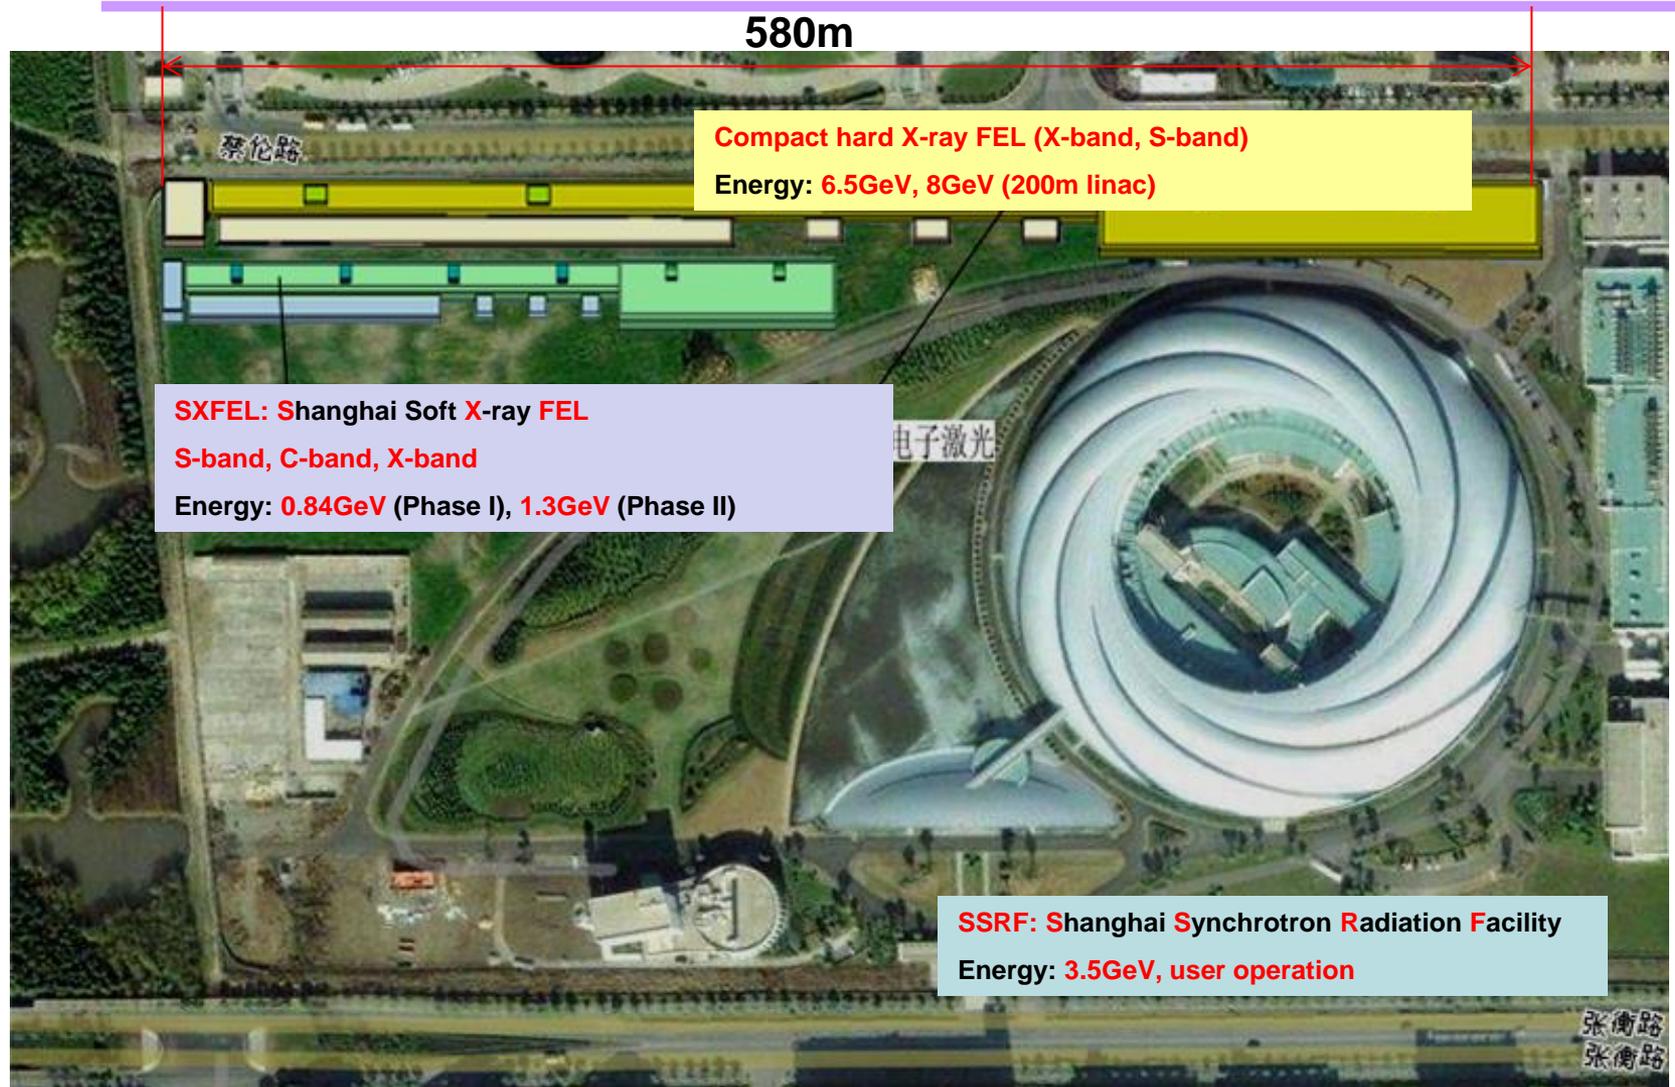


C-band and X-band plans for soft X-ray FEL (SXFEL started in 2014)

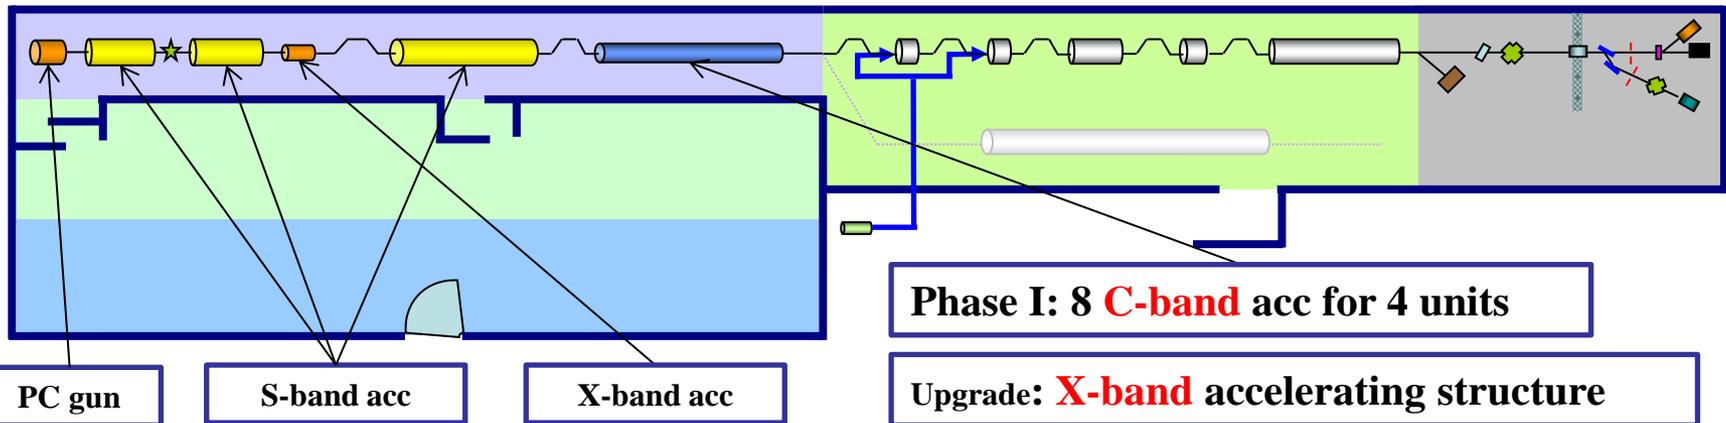


Parameters	Phase I	Upgrade	Unit
Output Wavelength	9	3	nm
Bunch charge	0.5~1	0.5~1	nC
Energy	0.84	1.2~1.3	GeV
Gradient	40	70-80	MV/m
Energy spread (sliced)	0.1-0.15 (0.02)	0.15 (0.03)	%
Normalized emittance	2.0~2.5	2.0~2.5	mm.mrad
Pulse length (FWHM)	1.	1	ps
Peak current	~0.5	0.5	kA
Rep. rate	1~10	1~10	Hz

X-band plan for compact hard X-ray FEL (On proposal)

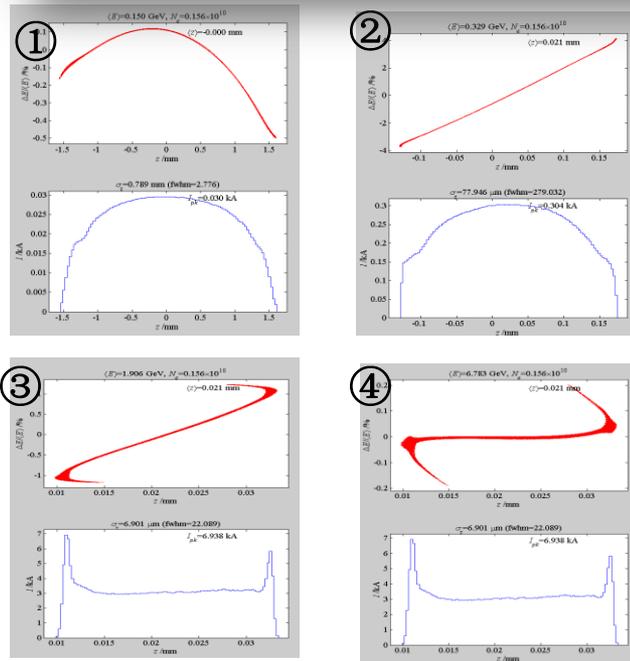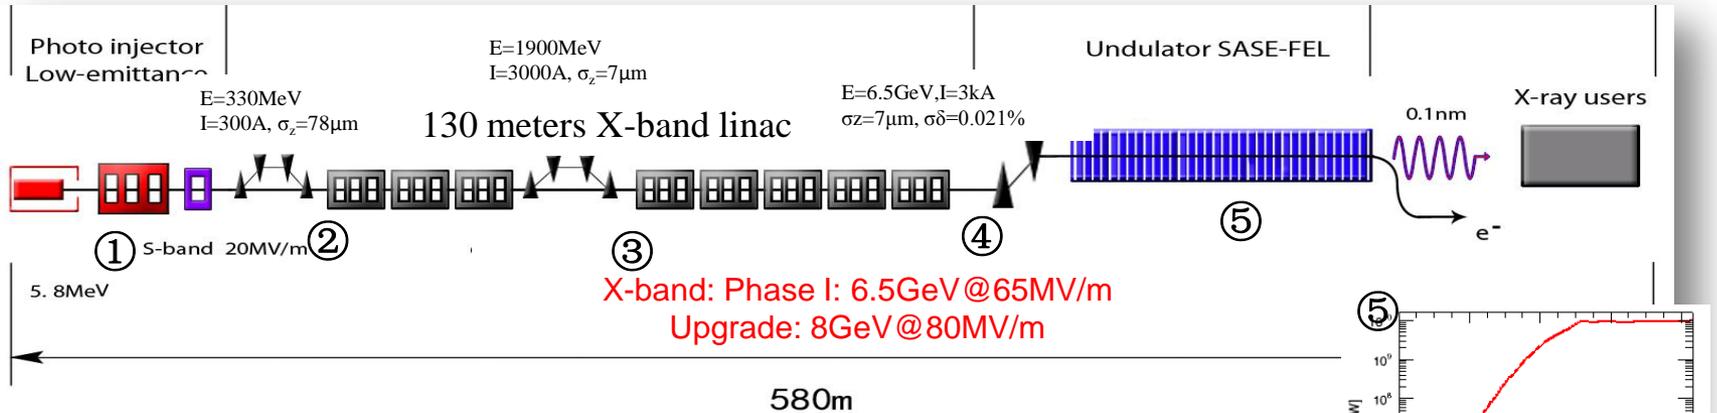


Parameters	Value
Output Wavelength	0.07nm
Bunch charge	250pC
Energy	6.5GeV
Normalized emittance	0.4μm
Energy spread (projected)	0.02%
Pulse length (Full)	40fs
Peak current	3kA
Rep. rate	60Hz
Peak power	10GW
Peak brightness	$2\cdot 10^{33}$

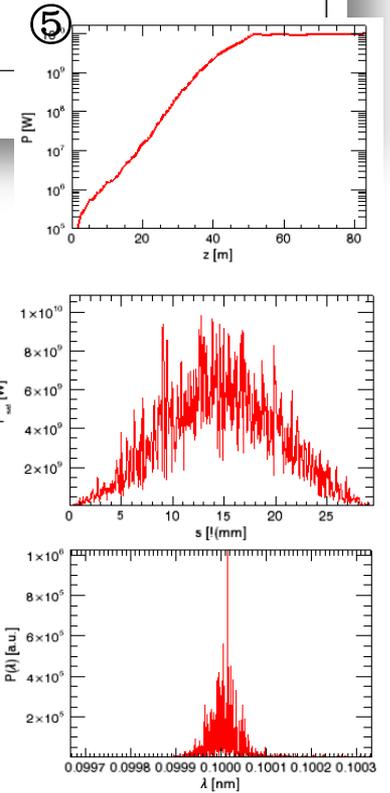


X-band accelerating structure for XFEL for 65MV/m, 80MV/m

Frequency	11424MHz
Phase advance	$4\pi/5$
Cell No.	89+2
Effective length	944.73 mm
Cell length, d	10.497mm
Iris thickness, 2a	1.5 mm
Ratio of elliptic radius, b_a	1.8
Aperture, a_r	4.3~3.05 mm
Group velocity, Vg/c	3.45%~1.12%
Shunt impedance, R	86.7~108.7MΩ/m
Attenuation factor, τ	0.61
Filling time, t_f	150 ns
Sc	4.14~2.33 MW/mm ²
E _{max} /E ₀	2.68~2.02
H _{max} /E ₀	2.68~2.39 mA/V
Input power, P _{in}	52MW @65MV/m 80MW @80MV/m
Two-Klystrons units	34 @65MV/m
30 MW/klystron	51 @80MV/m

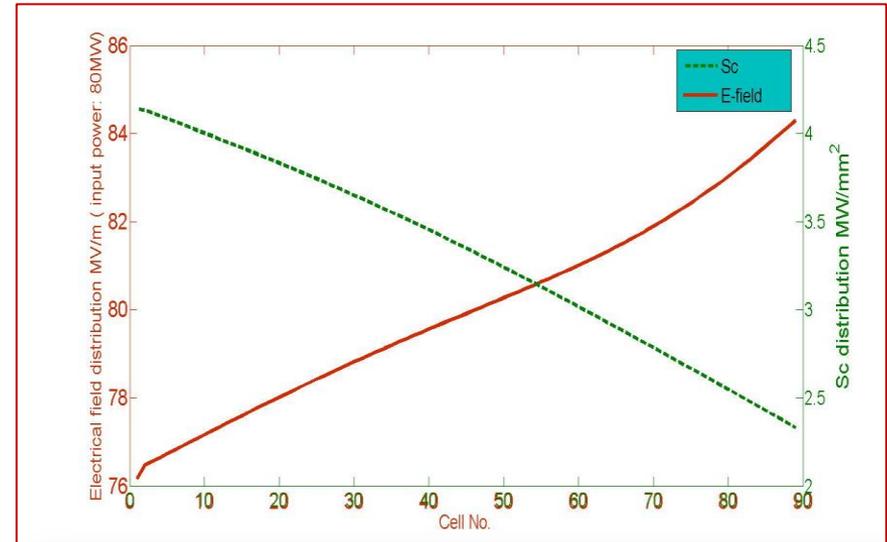

1. Magnetically coupling
2. Dual port coupler
3. Race-track coupler
4. Round shape cell

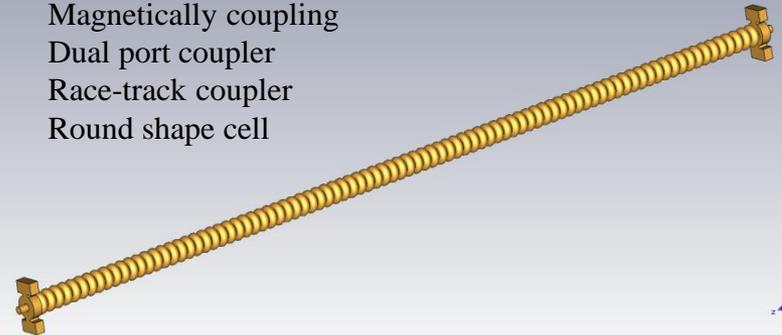

More details in TUPP127




Outline





- Introduction
 - Initial motivation for high-gradient acceleration
 - The CLIC R&D towards 100 MV/m acceleration
- **New applications**
 - Energy upgrade of existing FELs (e.g. FERMI@Elettra, Trieste)
 - Compact hard X-ray FELs (e.g. SINAP, Shanghai)
 - **Compton and neutron sources (e.g. University of Tokyo)**
 - Proton therapy linacs (e.g. TULIP-2, TERA)
- Conclusions




Application of Compact Accelerator Neutron Sources

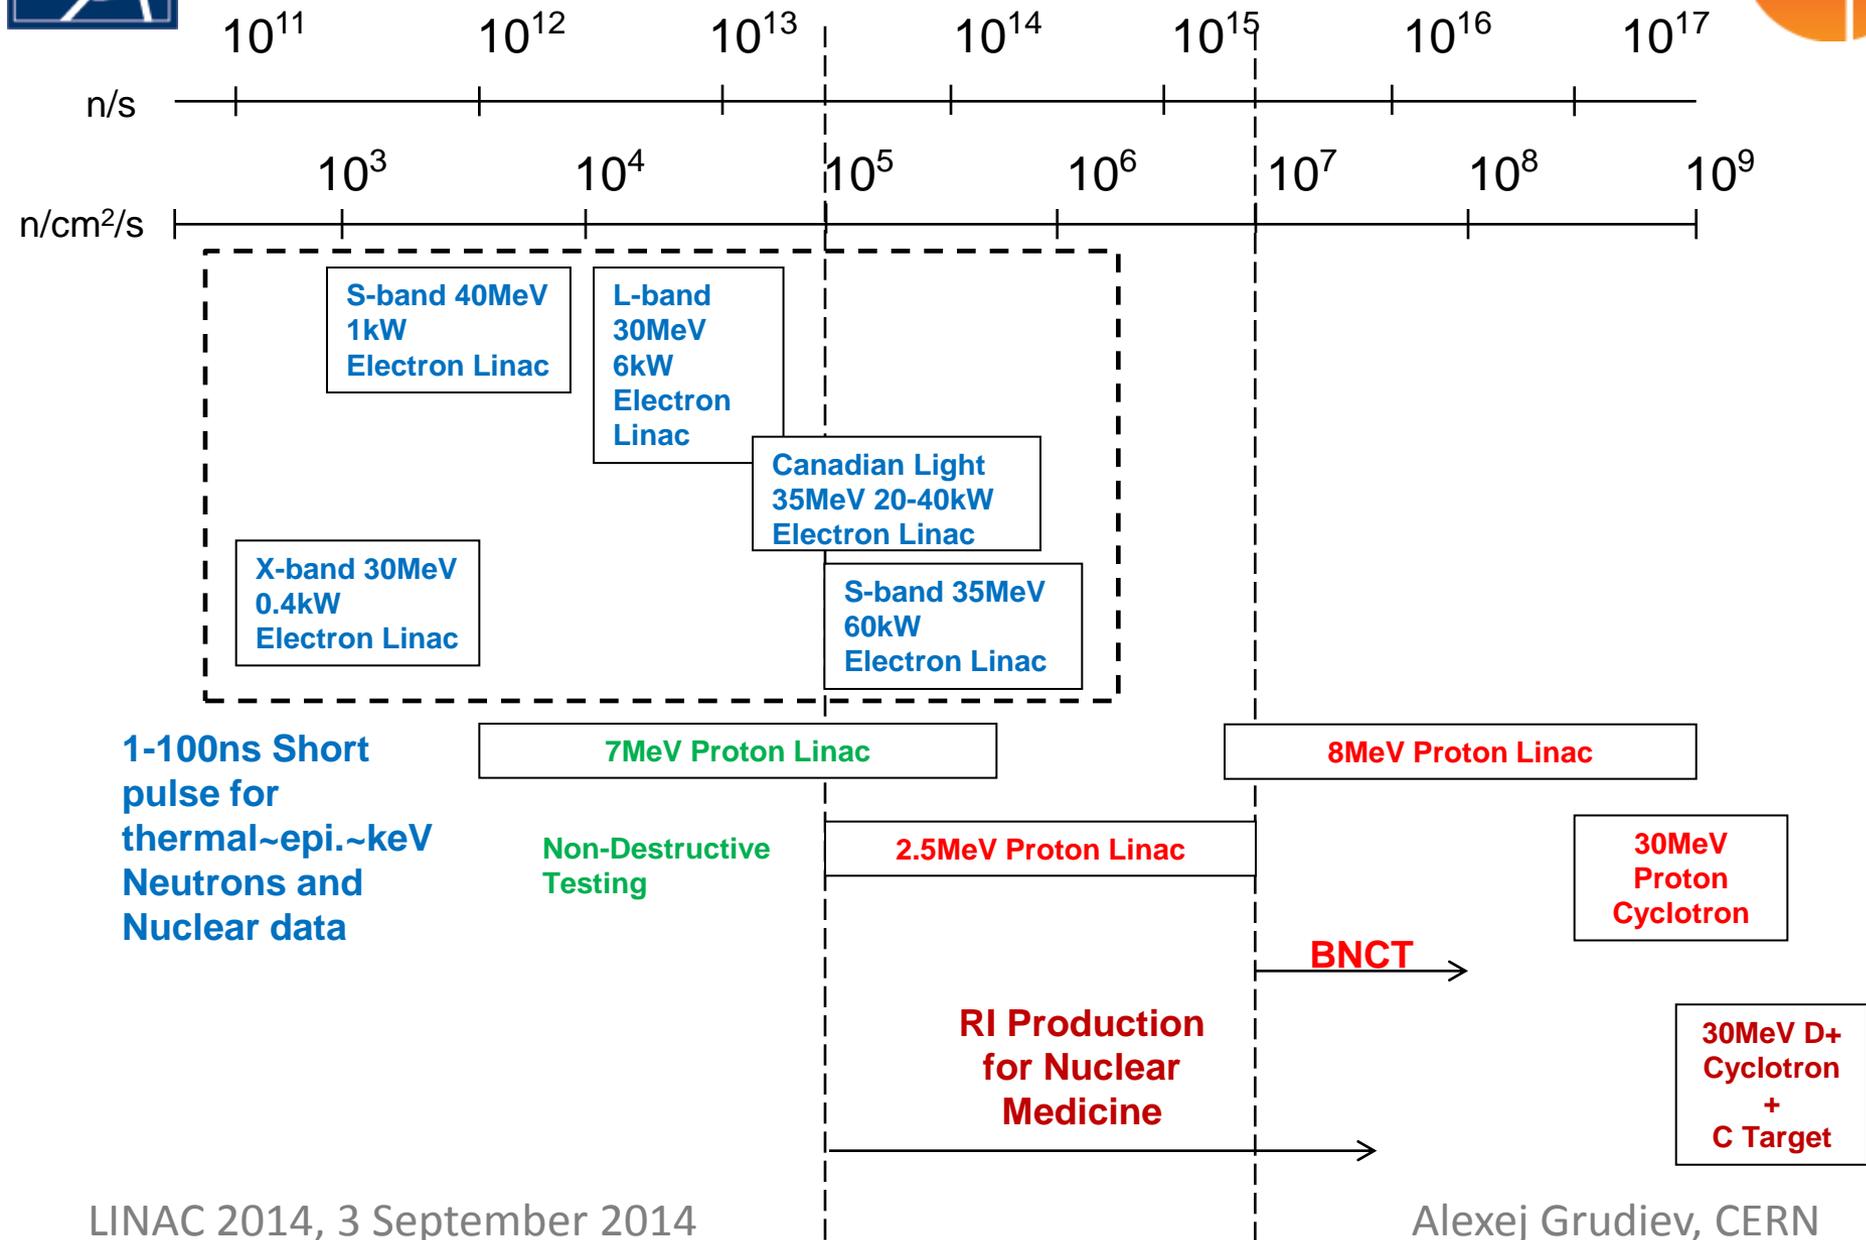

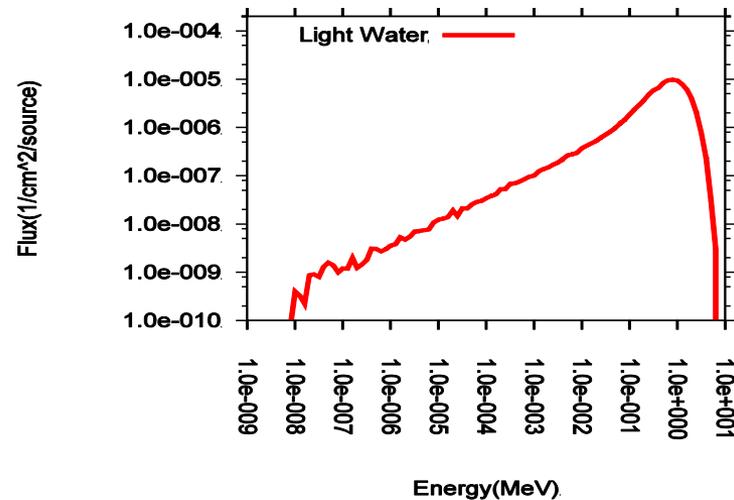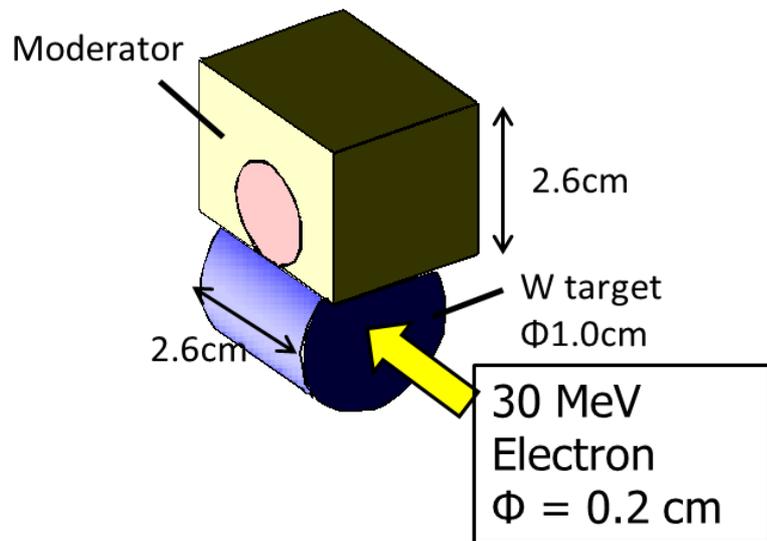

Beam Power	375 W
Target intensity	1.3×10^{11} n/s
Pulse width behind moderator (10 – 100 keV neutron)	6.66 ns
Neutron flux at measurement point (5m TOF)	1.1×10^3 n/cm ² /s

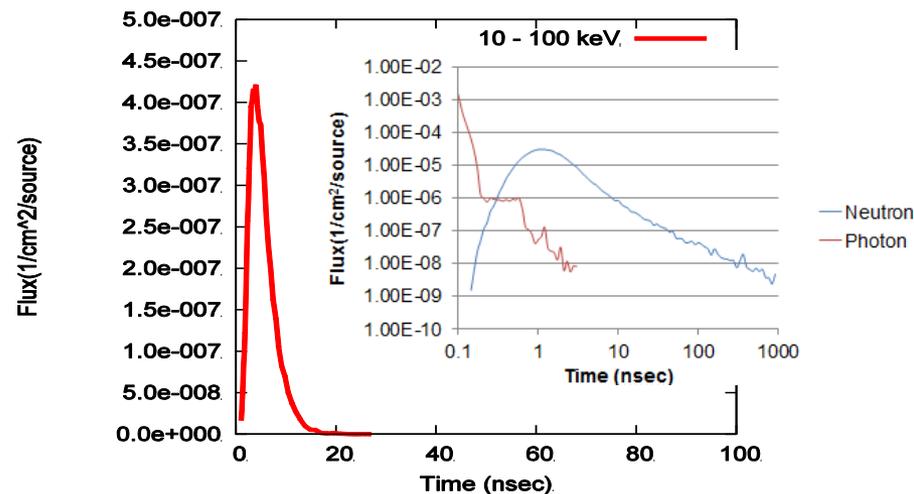






Compact X-band 30 MeV electron linac at Univ. of Tokyo



Linac will be moved from **Compton source** to the area of decommissioned research reactor "Yayoi" for a **neutron source**

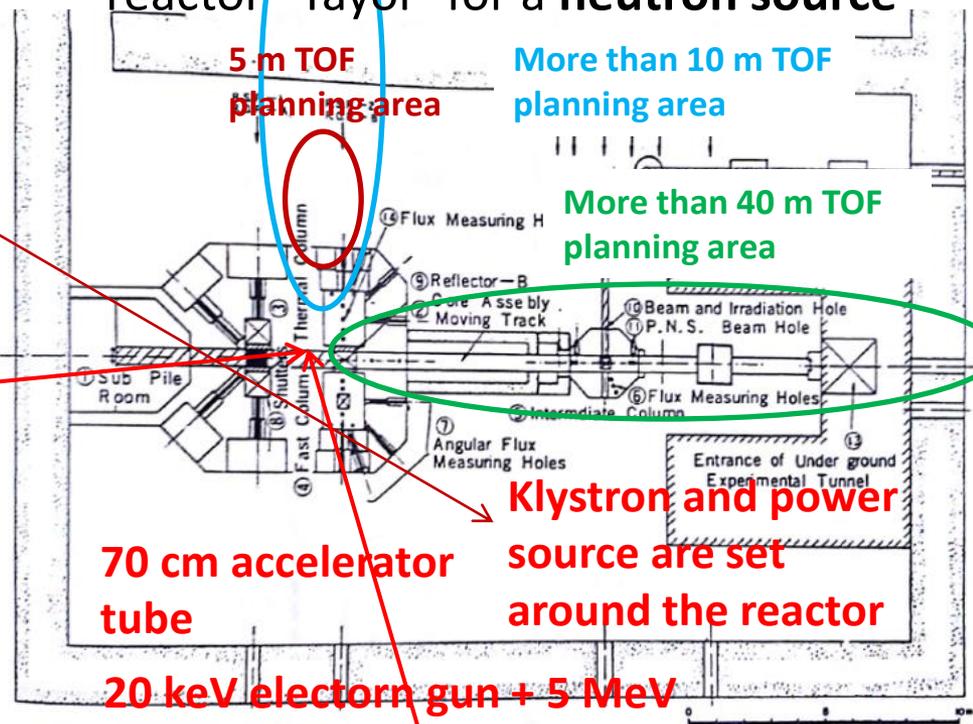

Application of the system is to measure more accurately the nuclear data for analysis of the fuel debris at Fukushima (F-1), nuclear transformation at ADS and design of new reactors in future.

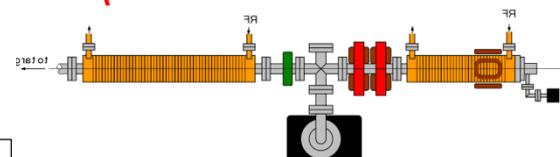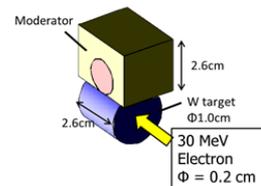



Outline




- Introduction
 - Initial motivation for high-gradient acceleration
 - The CLIC R&D towards 100 MV/m acceleration
- **New applications**
 - Energy upgrade of existing FELs (e.g. FERMI@Elettra, Trieste)
 - Compact hard X-ray FELs (e.g. SINAP, Shanghai)
 - Compton and neutron sources (e.g. University of Tokyo)
 - **Proton therapy linacs (e.g. TULIP-2, TERA)**
- Conclusions



TULIP (TUrning LINac for Protontherapy)



“Proton and Carbon Linacs for Hadron Therapy”, Ugo Amaldi, Friday 11:30, LINAC14

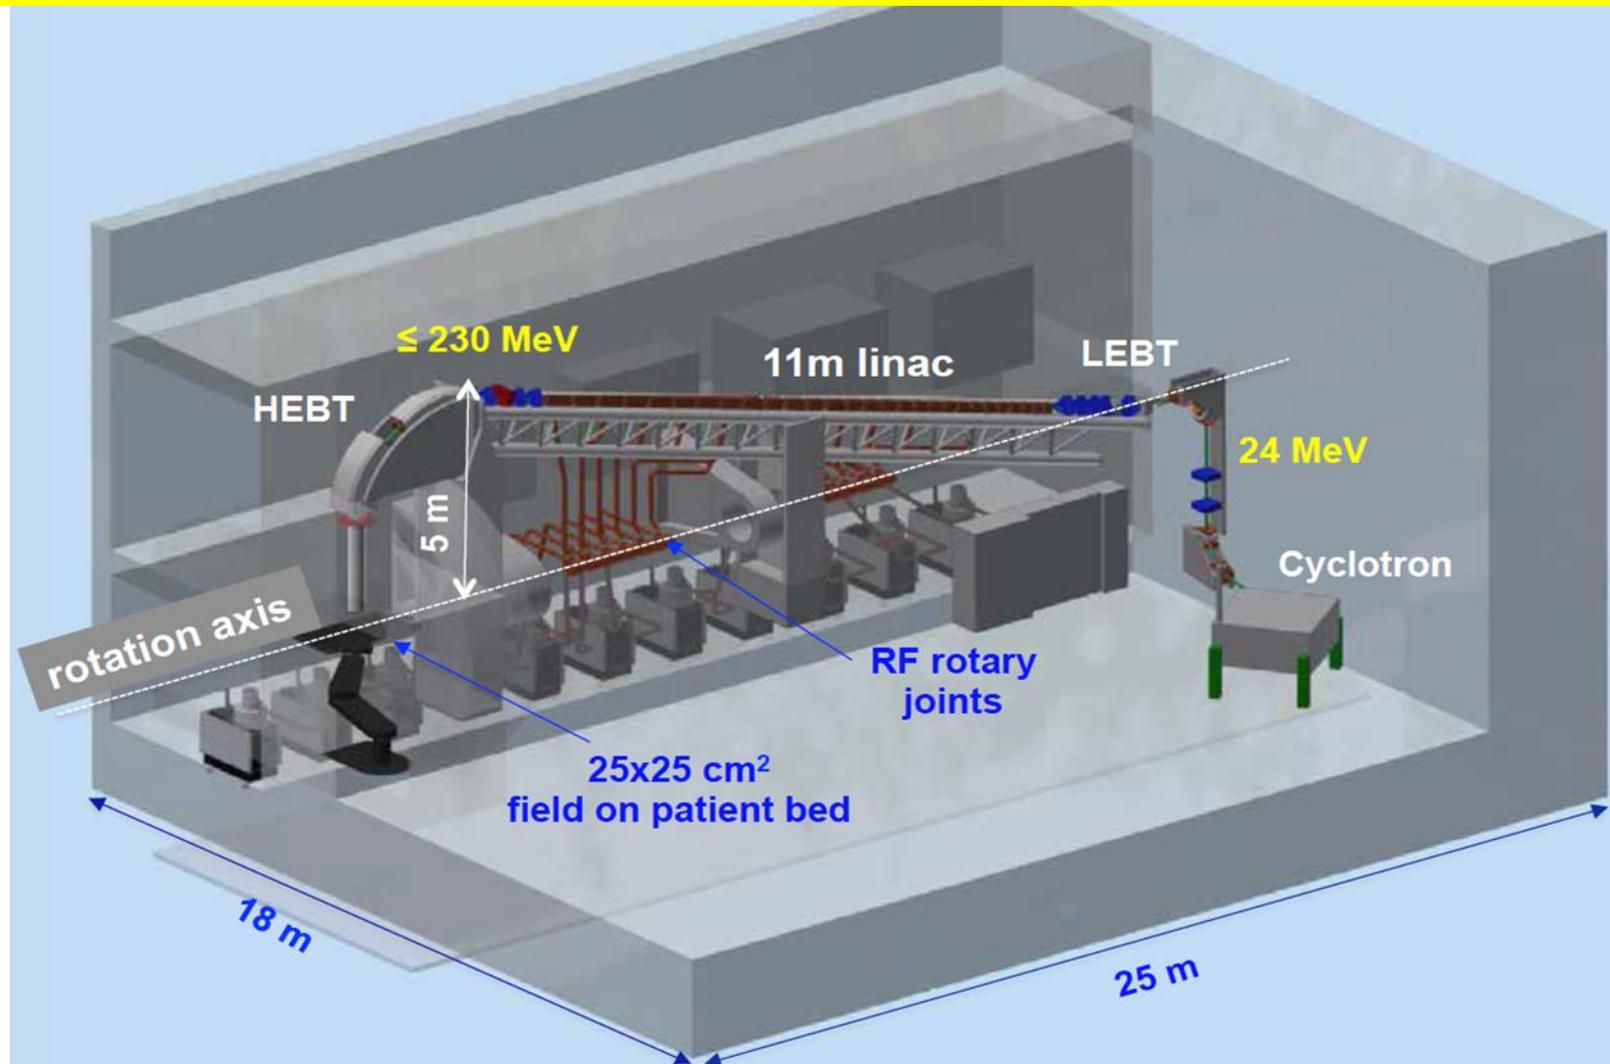




TULIP at 3 GHz with $E_0 = 30$ MV/m





present technology : 30 MV/m

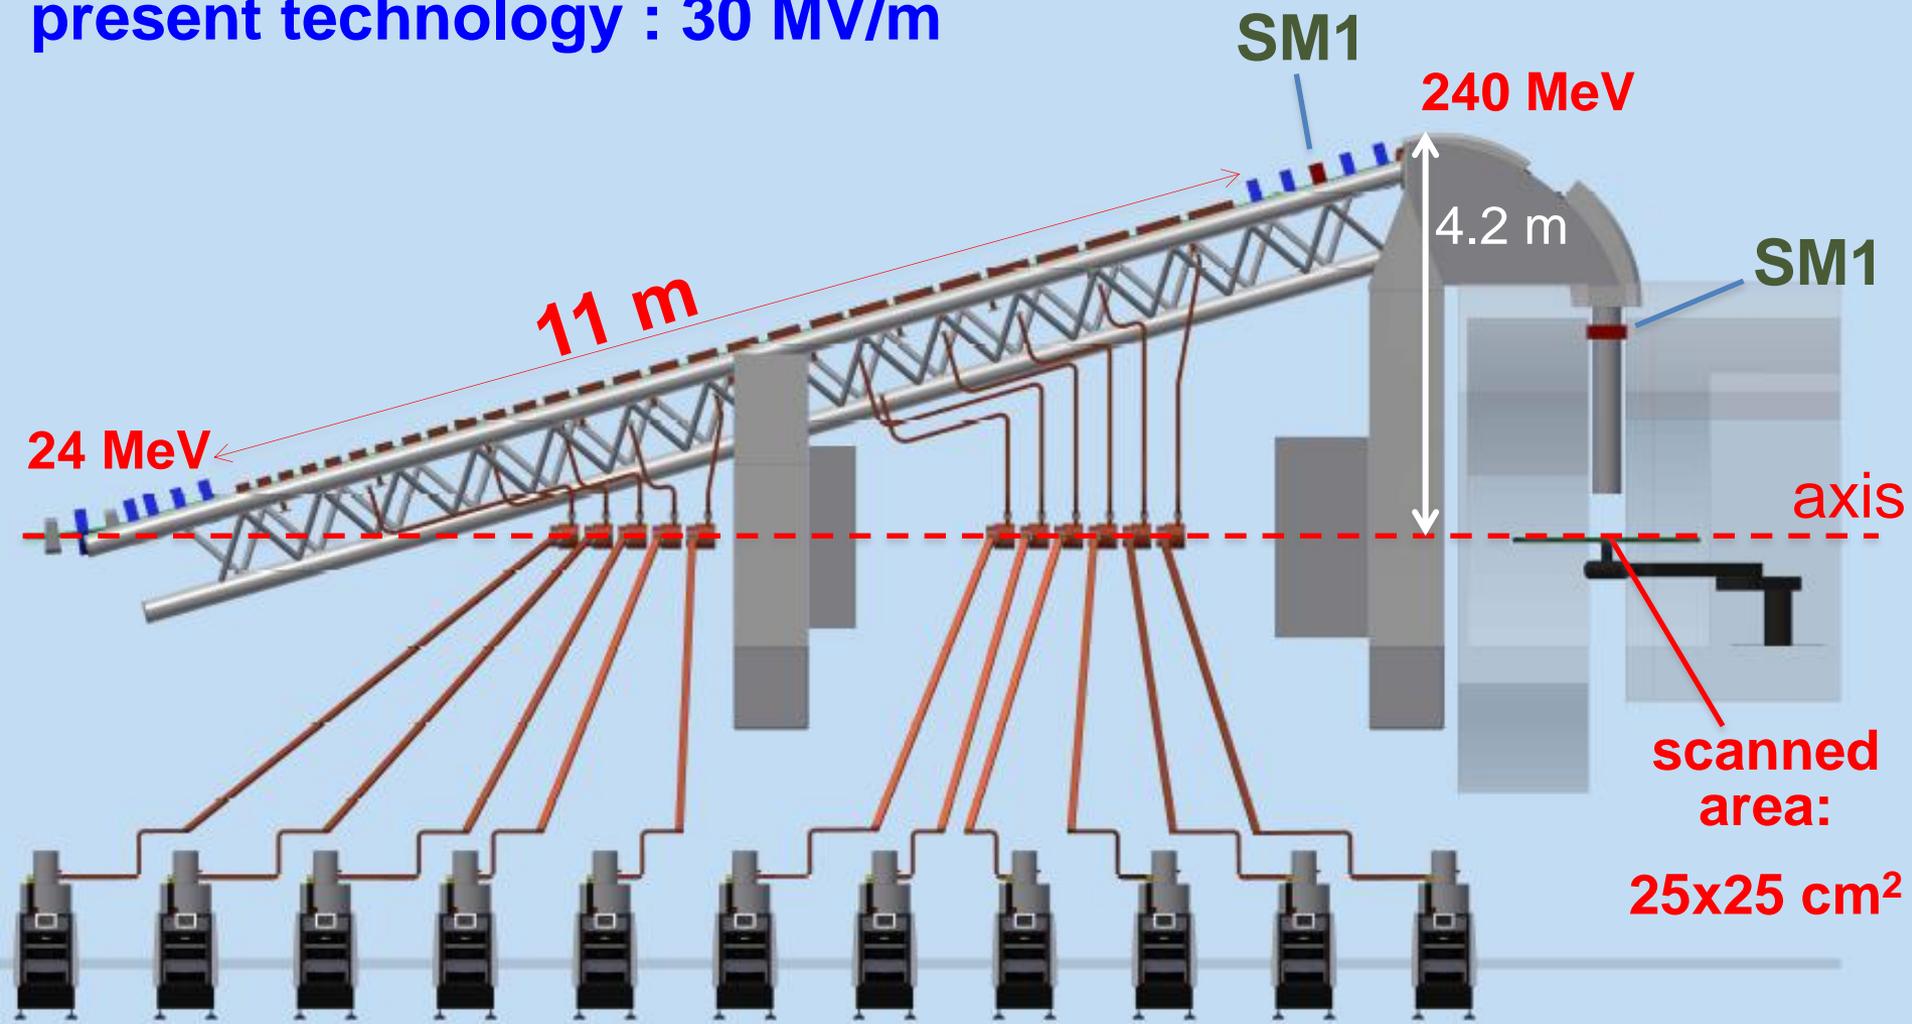

CLIC high gradient technology applied to S-band:

100 MV/m for $\beta=1$ electron linac and
50 MV/m for low- β proton linac
have similar limitations
in terms of high gradient

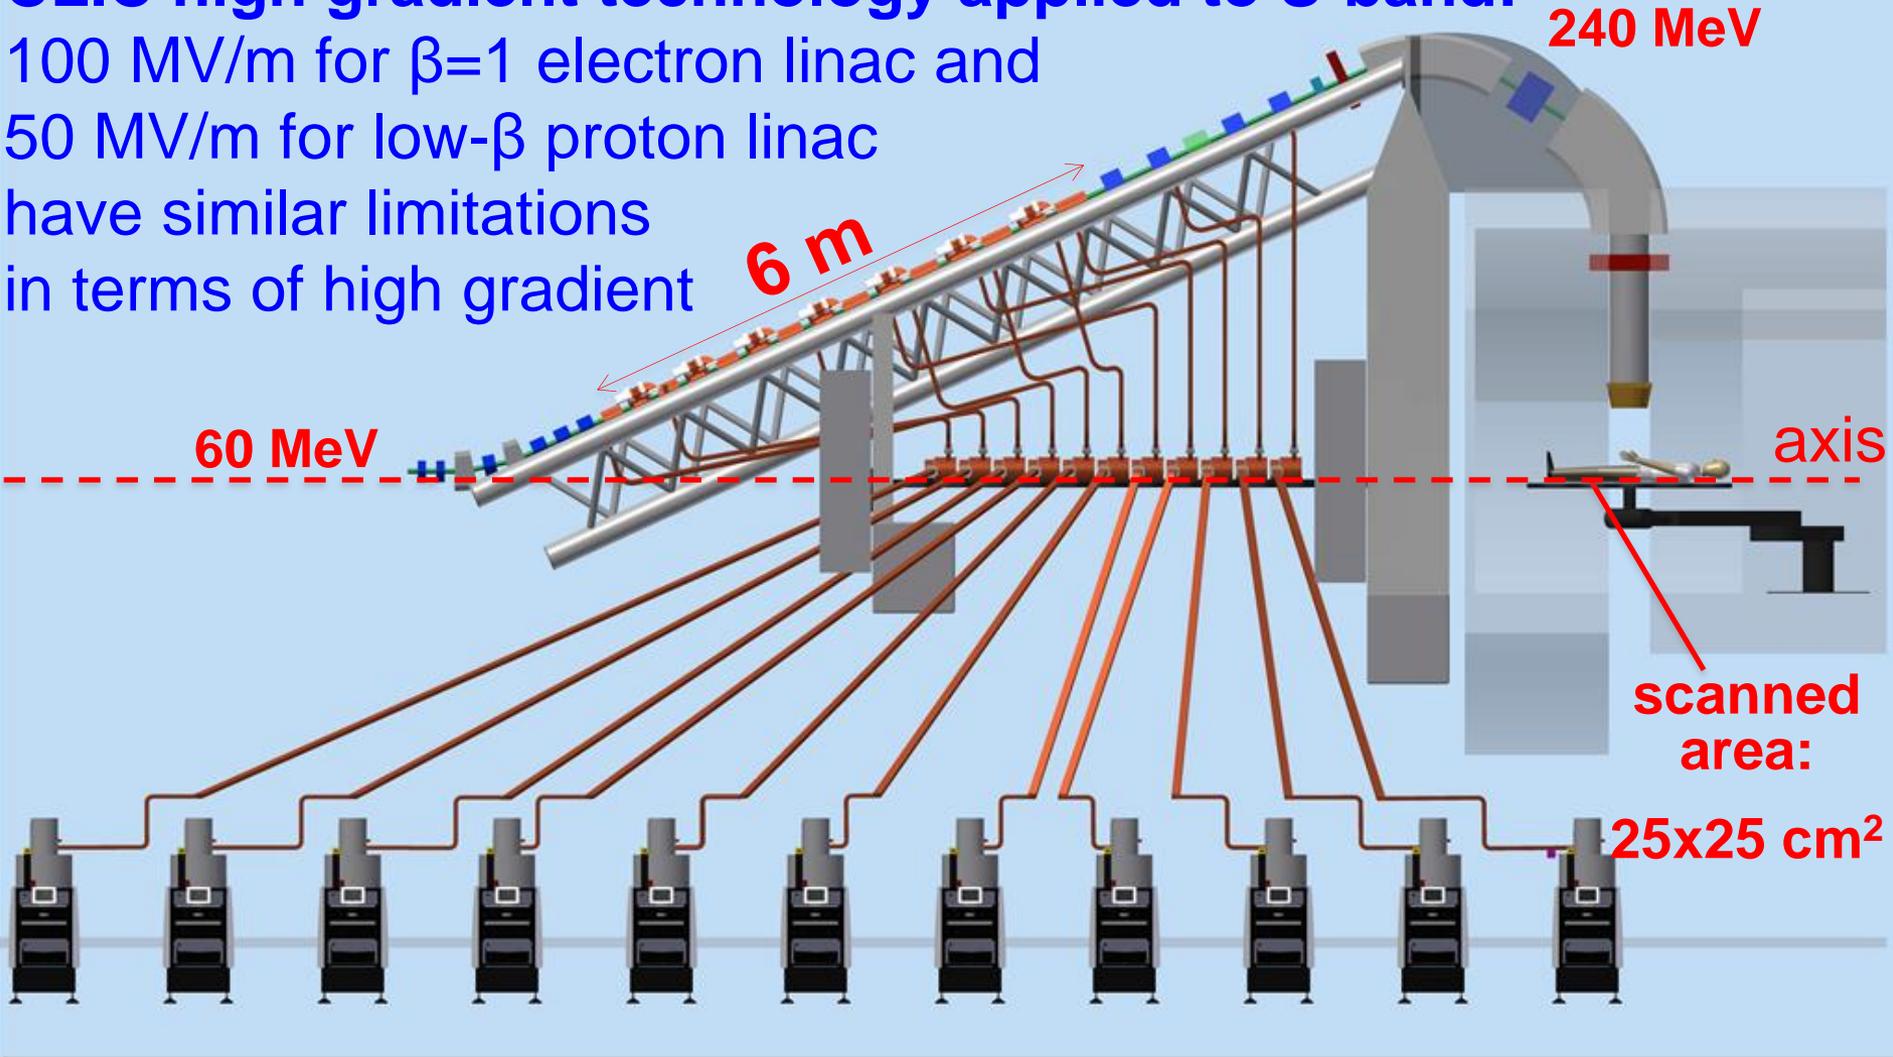


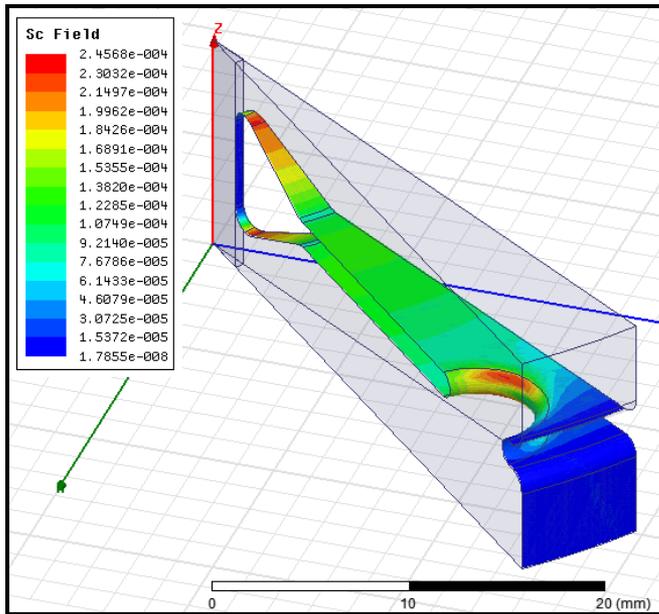

Expected performance

Accelerating gradient: 50 MV/m

Breakdown rate: 10^{-6} bpp/m

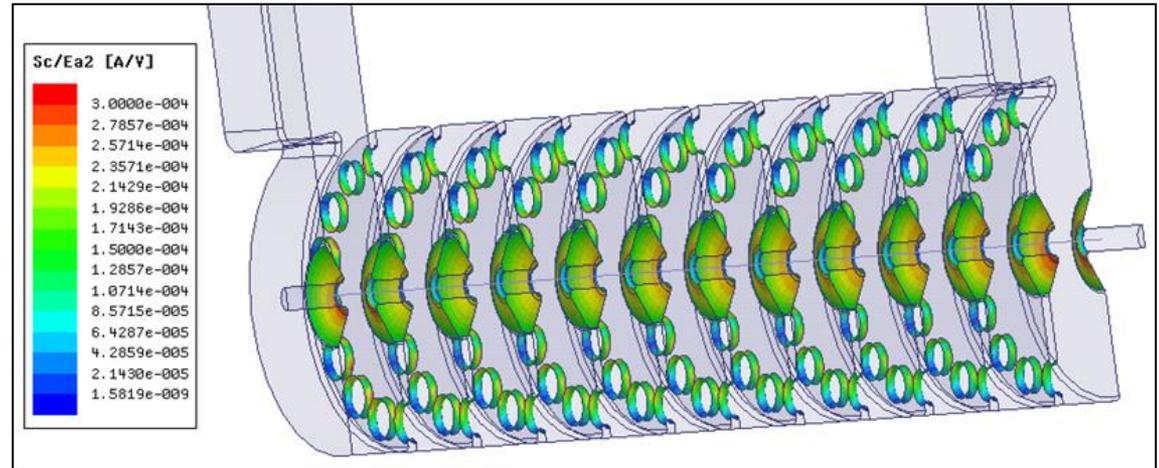

Cells are optimized to have minimum:

$$\frac{P}{E_a^2} \cdot \frac{S_c}{E_a^2} = \frac{v_g}{\omega} \cdot \frac{S_c}{R'/Q} E_a^2$$

First prototype is being built by CERN and TERA in the framework of CERN KT funded project: “High-gradient accelerating structures for proton therapy linacs”

More details in THPOL08 and THPP061



Conclusions

- For large linac-based installations, like a linear collider, the optimum gradient is high. It approaches the highest possible gradient limited by the fundamental physical phenomena
- For medium and small sized linac-based installations, built in a “green field”, the optimum gradient is usually not the highest possible
- BUT there are many cases where **high gradient is required**:
 - Given the final energy of the linac and the space limitations of existing infrastructure (e.g., research labs., universities)
 - The cost of infrastructure is very high (e.g. medical facilities)



Acknowledgements

- Walter Wuensch, Nuria Catalan Lasheras (CERN)
- Toshiyasu Higo (KEK)
- Gerardo D'Auria, Simone Di Mitri (Elettra-Sincrotrone Trieste)
- Zhentang Zhao, Qiang Gu, Wencheng Fang, Meng Zhang, Chao Feng (SINAP)
- Mitsuru Uesaka (University of Tokyo)
- Ugo Amaldi (TERA)

Thank you for your attention.

Last but not least, I would like to apologize for not being able to cover all high gradient linacs related projects and activities.