



Managed by Fermi Research Alliance, LLC for the U.S. Department of Energy Office of Science

An 800 MeV Superconducting Linac to Support Megawatt Proton Operations at Fermilab

Paul Derwent, Steve Holmes and [Valeri Lebedev](#)


August 31 – September 5, 2014

Linac 14



Outline

- Fermilab accelerator complex
- PIP-II goals and parameters
- SC linac and subsystems
- PXIE – frontend test
- Summary

Fermilab Accelerator Complex

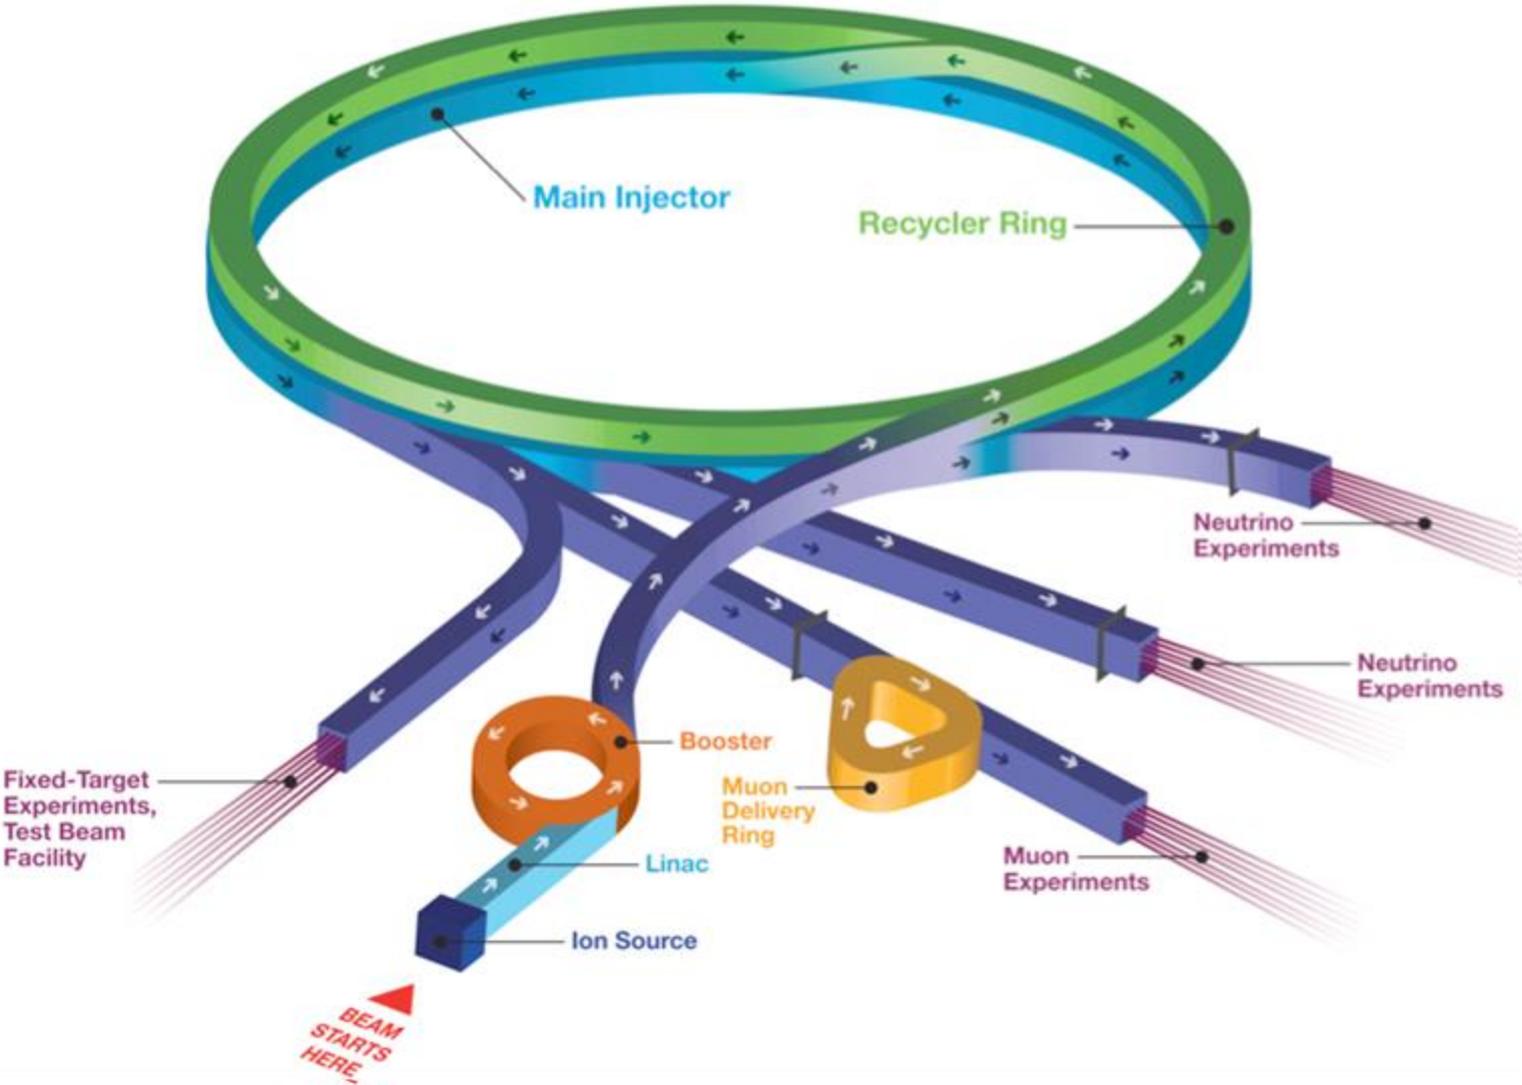

From Project X to PIP-II

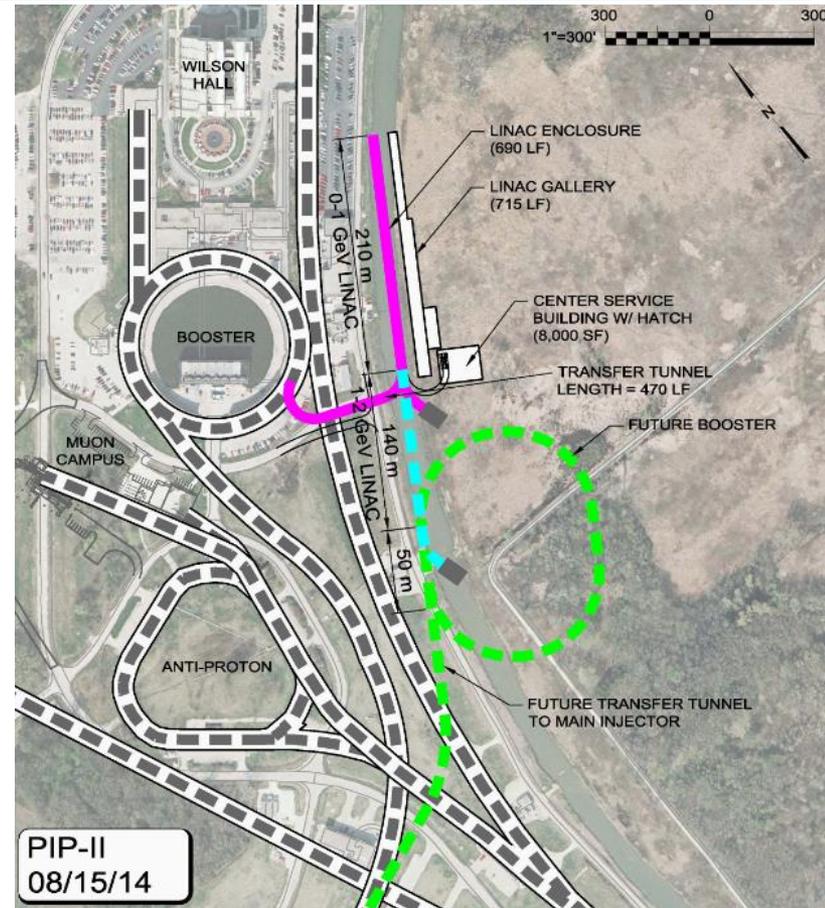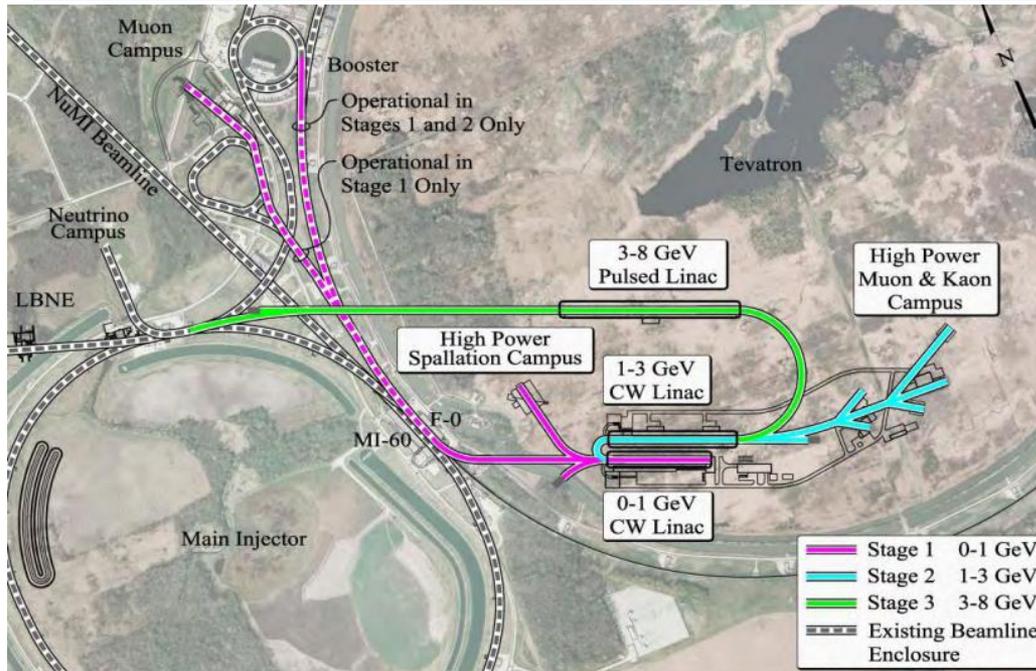

- Project X was conceived as a facility supporting large number of intensity frontier experiments (ν , μ , K)
- PIP-II
 - Will support for the world leading ν experiments
 - Favorably positions Fermilab into the future

From PIP to PIP-II


- PIP - Proton Improvement (next few years)
 - Fermilab Booster upgrade to support NoVA at 700 kW
 - 7 Hz -> 15 Hz
- PIP-II (construction: 2019-2024?)
 - Next step in the power increase
 - Major goals
 - 700 kW -> 1.2 MW at 120 GeV (LBNF)
 - More power for 8 GeV program: 80 ->160 kW (SBNE, ...)
 - New SC linac to increase E_{inj} (400 -> 800 MeV)
 - Particles per pulse extracted from Booster: $(4.3 \rightarrow 6.5) \cdot 10^{12}$ ($\times 1.5$)
 - Pulsed operation to reduce cost (reuse Tevatron infrastructure)
 - An experiment in near reach
 - μ -to-e upgrade at 15-30% duty factor (7 kW -> 100 kW)
 - Requires new beam line

Future Directions

- The configuration and siting of the PIP-II linac are chosen to provide opportunities for future performance enhancements
 - multi-MW to LBNF (1.2 -> 2.4 MW)
 - CW capability brings us to other Project X experiments
 - 0.8 GeV (up to 1.6 MW total, RF separ. -> multiple experiments)
 - μ -to-e upgrade – step 0
 - Other experiments with muons ($\mu \rightarrow 3e$, ...)
 - Experiments with neutrons (n - \bar{n} , ...)
 - Nuclear physics & EDMs
 - 3 GeV
 - Kaons
 - Front end for a muon-based facility
- The details will be determined by future HEP programmatic choices (~10 years down the road)

FNAL Accelerator Complex Beyond PIP-II

- PIP-II limitations:
 - Slip-stacking in the Recycler is questionable at intensities beyond PIP-II
 - Beam loss and stability at slip-stacking
 - Booster intensity is limited to $\sim 7 \times 10^{12}$ ppp by impedance and transition crossing
- That sets the strategy for next steps
 - A new 8 GeV source is necessary
 - Possibilities
 - 1.5-2 GeV linac + conventional RCS
 - Lower energy linac + ‘supersmart RCS that mitigates beam losses (integrable optics? R&D into space charge effects is initiated)
 - 8 GeV linac
 - Presently looks as more expensive
 - Higher injection energy – Higher beam loss ?

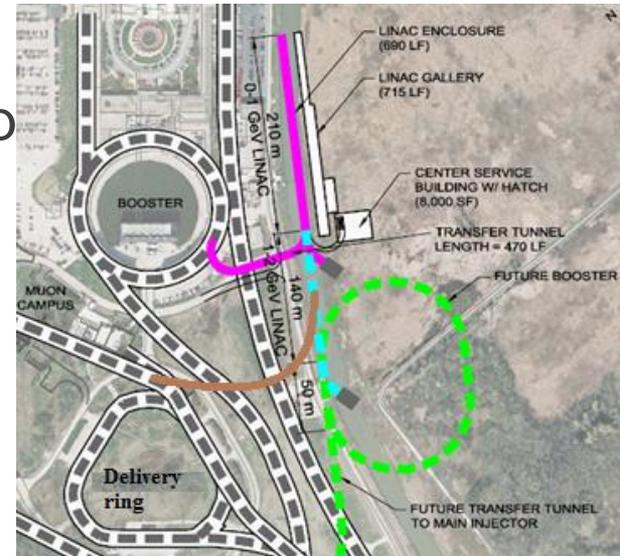


PIP-II Design Choices

- Future program with rare decays requires SRF linac
- That sets further choices
 - Relative to the Project X the PIP-II scope & cost are reduced
 - SRF technology map is unchanged
 - Makes future upgrades easier
 - The scope changes
 - CW linac energy: 3 GeV \rightarrow 0.8 GeV
 - Linac operates in pulsed regime
 - To avoid construction of new cryo-plant
 \Rightarrow significant cost reduction (collaboration with India can change this)
 - All other systems are CW compatible
 - creates many possibilities in the future
 - Booster is used to accelerate to 8 GeV
 - upgraded to higher E_{inj} and rep. rate
 - Booster and MI upgrades are not parts of PIP-II project

PIP-II versus PIP


Performance Parameter	PIP	PIP-II	
Linac Beam Energy	400	800	MeV
Linac Beam Current	25	2	mA
Linac Beam Pulse Length	0.03	0.55	ms
Linac Pulse Repetition Rate	15	20	Hz
Linac Upgrade Potential	N/A	CW	
Booster Protons per Pulse (extracted)	4.2×10^{12}	6.5×10^{12}	
Booster Pulse Repetition Rate	15	20	Hz
Booster Beam Power @ 8 GeV	80	160	kW
8 GeV Beam Power to MI (LBNE)	-	80-120*	kW
Beam Power to 8 GeV Program	-	80-40*	kW
Main Injector Protons per Pulse (12 batches; extr.)	4.9×10^{13}	7.6×10^{13}	
Main Injector Cycle Time @ 120 GeV	1.33	1.2	sec
Main Injector Cycle Time @ 60 GeV	N/A	0.8	sec
Beam Power @ 60 GeV (LBNE)	N/A	0.9	MW
Beam Power @ 120 GeV	0.7	1.2	MW
Upgrade Potential @ 60-120 GeV	-	>2	MW

Linac Structure

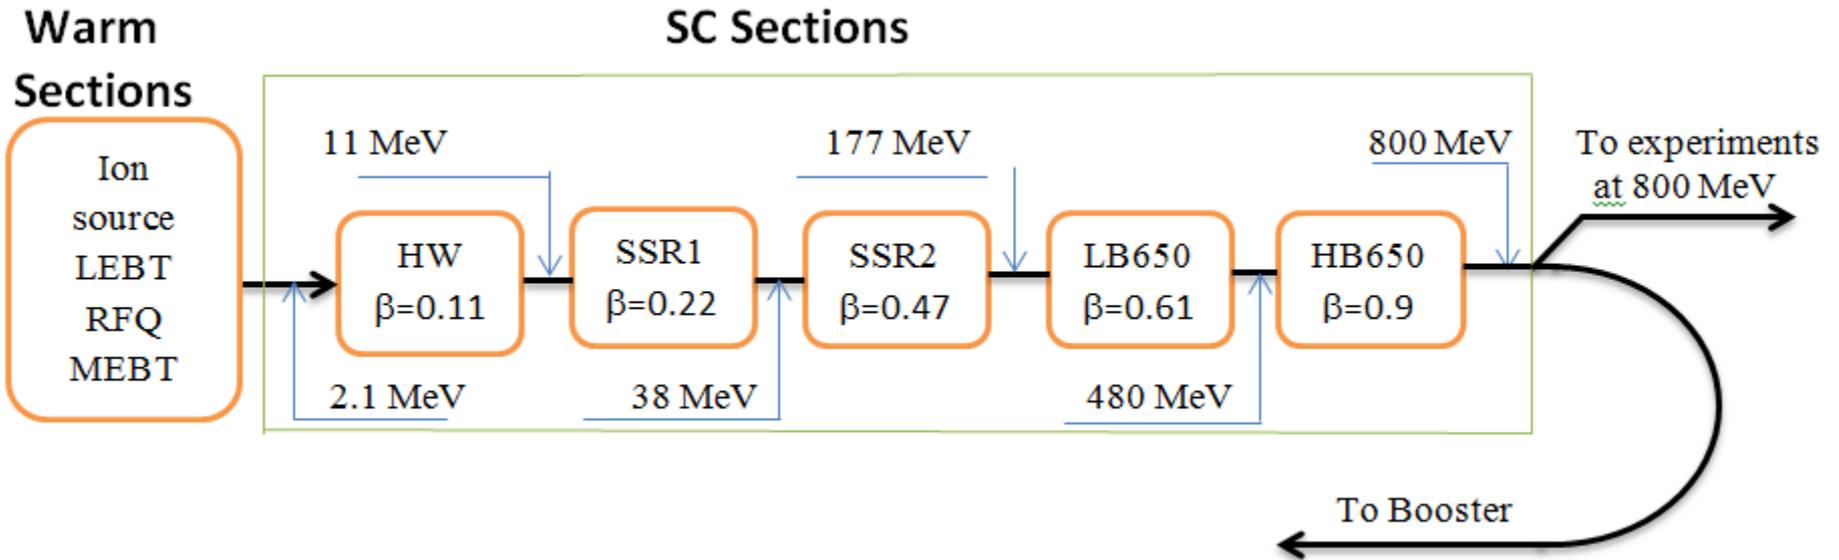

- Room T acceleration to 2.1 MeV
 - 5 types of SC cavities
 - Solenoidal focusing for first 3 types
 - Doublet focusing for LB & HB
 - HW & SSR1 operate in CW other in pulsed regime

PIP-II Warm Frontend

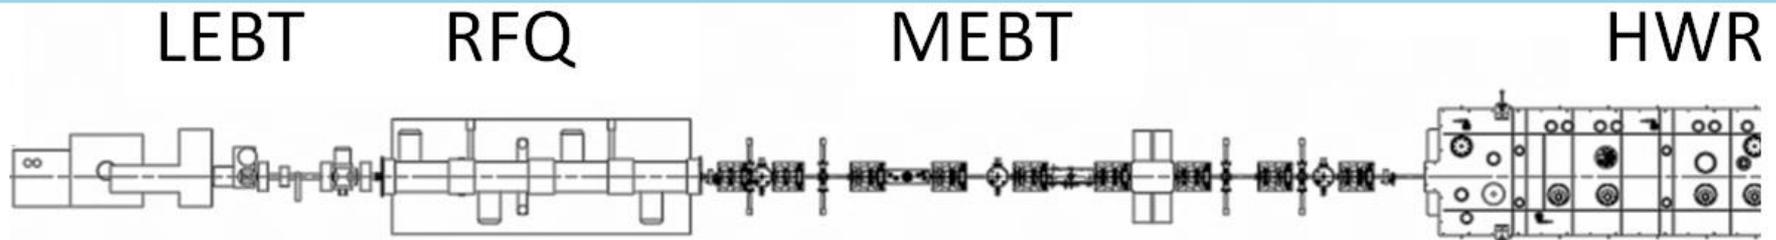


- “Standard” scheme for beam acceleration
 - 30 kV ion source (5 mA nominal, 10 mA max)
 - 2 sources and dipole switch
 - LEBT with beam pre-chopping for machine tuning
 - 3 solenoids, good differential pumping
 - 2.1 MeV CW RFQ
 - $f=162.5$ MHz set by bunch-by-bunch chopping
 - MEFT (~10 m)
 - Bunch-by-bunch chopper
 - 2 kickers with $\mu=180^\circ$ to minimize voltage; $V \approx \pm 250$ for bipolar feeding
 - 3 RF cavities, 8 periods, quads (7 triplets, 2 doublets), instrumentation
 - Beam absorber (20 kW) & differential pumping

PIP-II SC Linac


- Tight solenoidal focusing in first 3 cryomodules
 - Space charge
 - Variation of cavity \perp defocusing along bunch
- External doublet focusing for LB&HB
 - Beam collimation and instrumentation between cryomodules

Section	Energy (MeV)	$\Delta E/\text{cav}$ (MeV)	R/Q (Ω)	Cav/CM	CM config.	CM length (m)
HWR	2.1-11	1.7	272	8 / 1	8 x (sc)	5.93
SSR1	11-38	2.05	242	16 / 2	4 x (csc)	5.2
SSR2	38-177	4.98	275	35 / 7	sccscsc	~6.5
LB650	177-480	11.6	378	30 / 10	(ccc)-(fd)	~3.9
HB650	480-800	17.7	638	24 / 4	(cccccc)-(fd)	~9.5

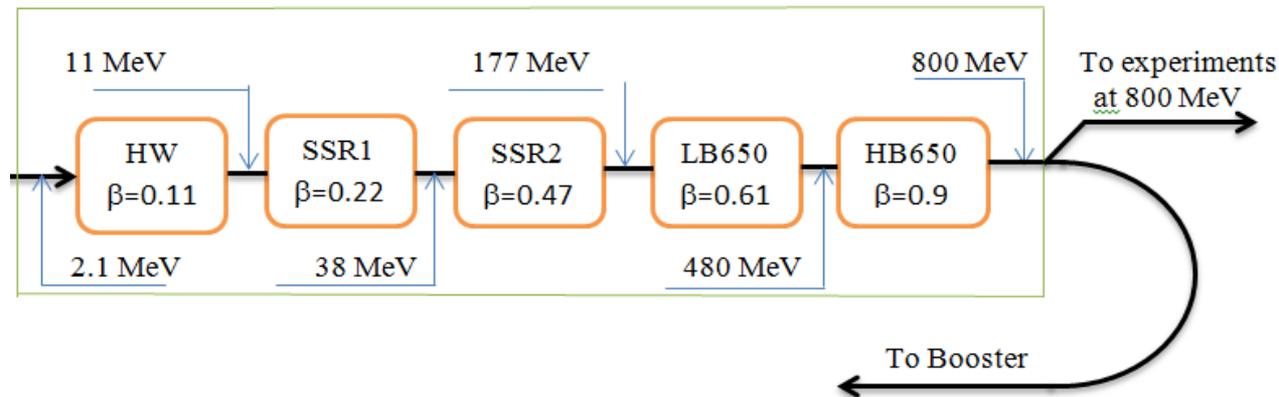


Beam Dynamics in SC linac

- Same as for the Project X linac
 - Moderate emittance growth in the course of acceleration
 - Beam loss is dominated by intrabeam stripping (<0.15 W/m)

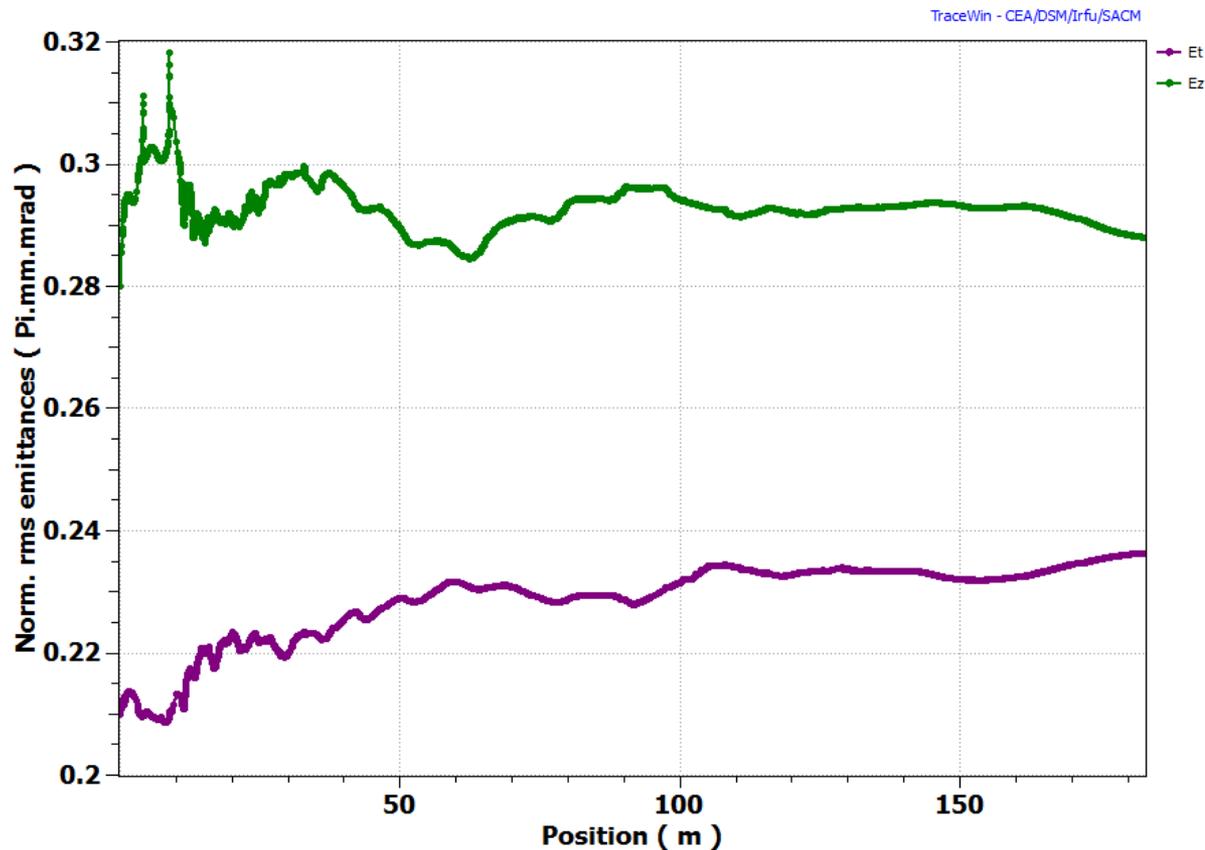

RF

- The average RF power has 2 contributions:
 - the energy transferred to the beam ($\sim 10\%$)
 - the energy required to fill and discharge the cavities (90%)
 - It does not depend on the peak RF power
- For fixed aver. power the cost of RF grows with peak power
 - therefore RF cost achieves minimum with minimum peak power
 - i.e. power equal to the power required for beam acceleration
 - \Rightarrow Duty factor for the RF power amplifiers $\approx 15\%$
 - In this case the cost savings associated with the pulsed power amplifiers are modest and therefore CW capable RF amplifiers are planned from the beginning

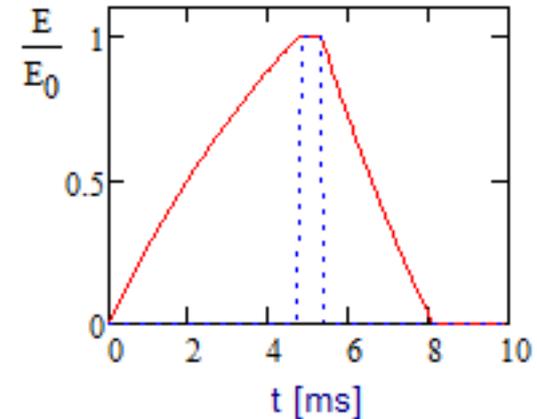

Microphonics and Lorentz Force Detuning (LFD)

- Low beam loading (2 mA)
⇒ narrow cavity bandwidth
⇒ microphonics issues

- Microphonics Control Strategies

- RF power reserve
- Good regulation of LHe pressure
- Reduced sensitivity of resonant frequency to LHe pressure
- Minimizing external vibrations and sensitivity to them
- Fast tuner driven by sophisticated feedback


- Pulsed operation complicates keeping cavity at resonance due to fast Lorentz force detuning
 - R&D is initiated

Section	Freq. f_0 (MHz)	Maximal detune (peak Hz)	Minimal Half Bandwidth, $f_0/2Q$ (Hz)	Max Required Power (kW)
HWR	162.5	20	34	4.8
SSR1	325	20	45	5.3
SSR2	325	20	27	17.0
LB650	650	20	29	33.0
HB650	650	20	31	48.5

Cryogenics


- Cost minimization => reusing existing Tevatron cryogenics
 - Cryogenic duty factor is ~6.6%
- Conservative approach for Q_0 :
 - Total cryogenic heat load at 2K (320 W) is dominated by static load (182 W)
 - It is ~17% of the CW load
- Upgrade to CW will require a new 2K cryogenic plant
- Note that
 - HWR & SSR1 cryomodules designed for CW operation
 - They will operate at CW
 - Negligible addition to the total load
- Success of R&D on Q_0 should allow operation at 20-30% duty factor
 - The μ -to-e upgrade without cryo-plant upgrade

	Q_0
HWR SSR1	5×10^9
SSR2	1.2×10^{10}
LB650	1.5×10^{10}
HB650	2×10^{10}

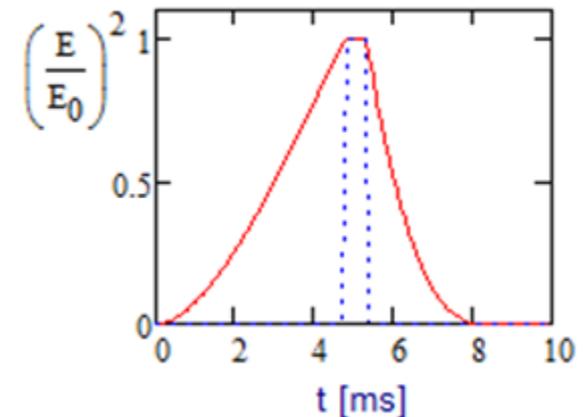

PXIE

- PXIE represents a complete systems test of the frontend
 - Has to retire major risks
 - CW RFQ, Chopper, MEBT differential pumping, low energy acceleration in SC cavities at high power
 - Test stand for suppression of resonance control and LFD
 - Development of SC linac diagnostics (LPM)
- PXIE accelerates beam to ~25 MeV and includes:
 - Warm front end + 2 SC cryomodules
 - HEBT + 50 kW beam dump
- PXIE status
 - LEBT: in commissioning
 - RFQ: comes this spring
 - MEBT: shortened version will be ready for RFQ test this year
 - Cryomodules: Designed, being built, expected to be ready ~2017
 - Beam commissioning ~2018

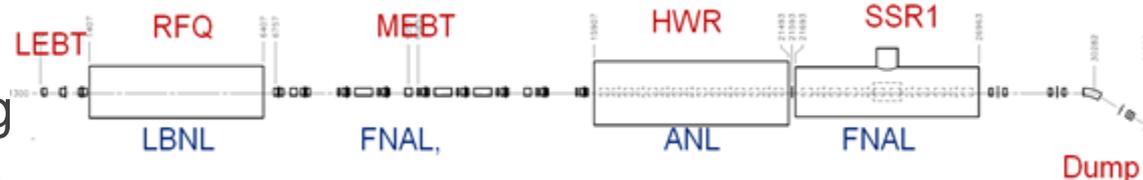

Conclusions

- Proton Improvement Plan-II supports long term physics research goals by
 - providing increased beam power to LBNF
 - and setting a platform for the future
- PIP-II is in the pre-CD-0 status
 - It has strong support from P5, OHEP, and Fermilab director
 - Plan presented to P5 and DOE proposes five year construction period starting in FY2019
- Strong endorsement of PIP-II in the P5 Report
 - **Recommendation 14**: Upgrade the Fermilab proton accelerator complex to produce higher intensity beams. **R&D for the Proton Improvement Plan II (PIPII) should proceed immediately**, followed by construction, to provide proton beams of >1 MW by the time of first operation of the new long-baseline neutrino facility.

Acknowledgements

PIP-II Collaboration

- Collaboration MOUs for the RD&D phase (through CD-2) :

National

ANL	ORNL/SNS	BNL
Cornell	UTenn	PNNL
Fermilab	TJNAF	LBNL
MSU	NCSU	ILC/ART

IIFC

BARC/Mumbai
IUAC/Delhi
RRCAT/Indore
VECC/Kolkata


Ongoing contacts with CERN (SPL), RAL/FETS (UK), ESS (Sweden), RISP (Korea), China/ADS

- PIP-II and PXIE posters at LINAC-14:
 - RT: TUPP047, TUPP051, THPP049, THPP055, THPP056
 - SC: MOPP047, MOPP049, MOPP052, MOPP055, MOPP056, TUPP052, TUIOC02, TUPP048, TUPP049; TUPP052, TUPP053, THPP001, THPP048, THPP050, THPP057

Thank you

Backup Slides

PXIE MEBT

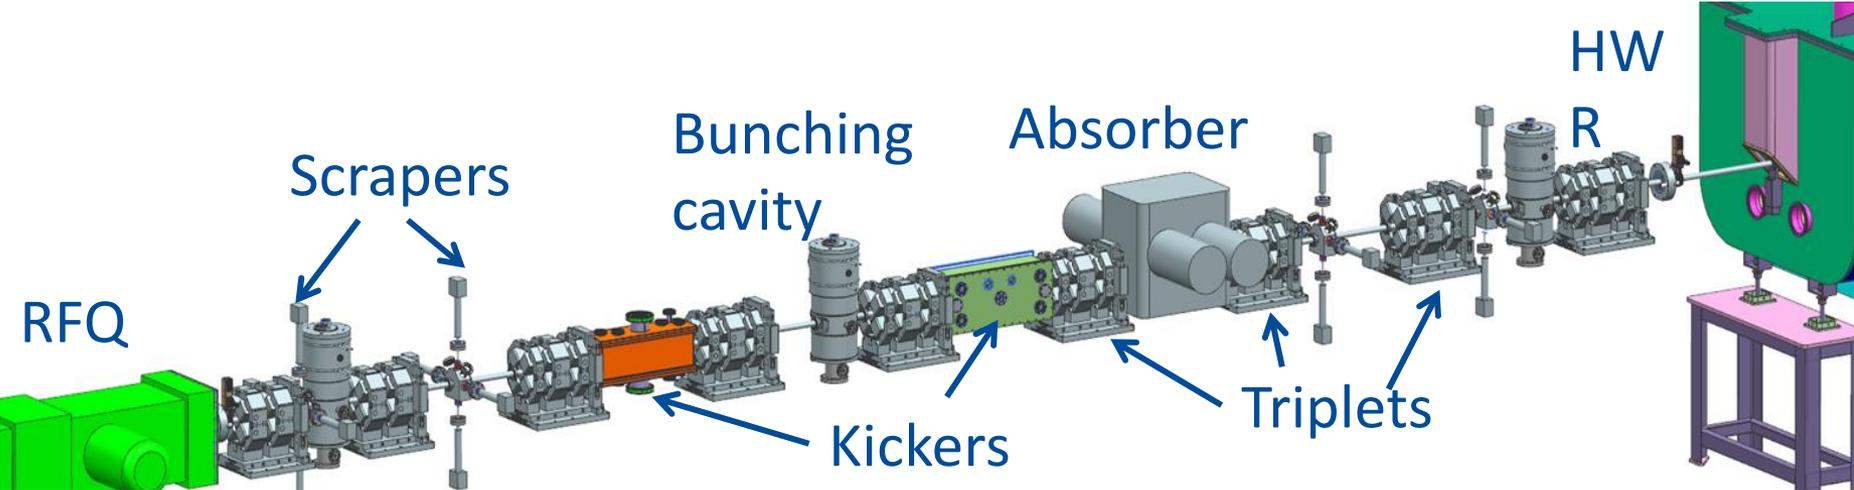

Cryogenic Loads

CM type	Number of CM	Static Load per CM at 2K [W]	Dynamic Load per CM at 2K [W]	
			CW	Pulsed, 6.6%DF
HWR	1	14	10	10*
SSR1	2	16	11	11*
SSR2	7	8.8	43	2.8
LB 650	10	5	73	4.8
HB 650	4	6.2	147	9.7
Total		182	1651	138
Cryo-plant		490 (margin of ~1.5 times)		