

# THZ-DRIVEN DEFLECTION OF ULTRASHORT ELECTRON BUNCH

Li Sun\*, Chengzhe Wang, Zhicheng Huang, Yelong Wei  
National Synchrotron Radiation Laboratory,  
University of Science and Technology of China, Hefei, China

## Abstract

Accurate characterization of longitudinal properties in ultrashort electron bunches constitutes a fundamental prerequisite for advancing scientific applications of compact particle accelerators. Here, we present an on-chip integrated terahertz (THz)-driven dielectric particle deflector based on the inverse Cherenkov effect: by coherently illuminating a high-breakdown-threshold right-angle prism with two linearly polarized lasers featuring a  $180^\circ$  phase difference, synchronized evanescent waves are excited on the prism's hypotenuse surface, enabling phase matching between particle velocity and wave velocity to generate sustained transverse deflection forces. This method successfully reconciles the inherent constraints of optical laser bunch length and radio-frequency input power, while achieving scalable temporal resolution from 10 femtoseconds to the attosecond regime. Simulation results validate that the proposed scheme provides a robust technical platform for on-chip longitudinal bunch diagnostics and particle manipulation, holding significant application prospects in electron bunch-based scientific facilities.

## INTRODUCTION

Transverse deflection structures (TDS) have been widely used as diagnostics and optimization devices to characterize longitudinal properties of electron bunches in many electron bunch-based scientific facilities such as ultrafast electron diffraction (UED) and microscopy (UEM), free electron laser (FEL), dielectric laser accelerator (DLA), laser-driven (LWFA) and bunch-driven plasma wakefield accelerator (PWFA) [1–6]. The X-band (11.4 GHz) TDS with compact design have demonstrated its ability to achieve femtosecond and sub-femtosecond longitudinal resolution, the recent experiments even show that sub-femtosecond resolution can be achieved at the C-band (5.7 GHz) range. However, emerging applications like femtosecond and attosecond pulses demand bunch diagnostics shorter than femtoseconds, a regime where conventional RF deflectors face two intrinsic limitations: (i) the low breakdown threshold of metallic cavities, and (ii) the lack of high-power sources at frequencies beyond the X-band.

In this work, we propose a THz-driven dielectric particle deflector that allows one to record the complete longitudinal information of an ultrashort electron bunch which can be integrated on chip. Though accurate control of two incident THz laser pulses' phase shift to  $180^\circ$ , the bunch channel constructed by symmetric dual prisms can generate a continuous synchronized deflecting force. In a

two-dimensional model, the fields can be decomposed into TE (with  $E_y$ ,  $H_x$ , and  $H_z$  nonzero) and TM (with  $E_x$ ,  $E_z$ , and  $H_y$  nonzero) polarization. The deflecting strength can be adjusted via THz field intensity, enabling deflecting voltages from MV/m to GV/m over micron-to-millimeter scales. Here, a simulation is presented to demonstrate the deflecting capability of dielectric prisms structure with a MV/m scale via inverse Cherenkov effect. Such a THz-driven dielectric particle deflector should have wide applications in many electron bunch-based facilities.

## STRUCTURE DESIGN

The schematic diagram of the proposed THz-driven electron bunch deflecting scheme is shown in Fig. 1. The design leverages the unique advantages of the THz regime, which bridges radio frequency and optical domains, to achieve both extended linear interaction lengths and higher than femtosecond-level temporal resolution. The perpendicularly incident single-cycle parallel-polarized THz pulses, generated via narrow band emission or optical rectification in lithium niobate (LN) crystals or other nonlinear organic materials, are used as driven laser pulses in prism microstructures. The electron bunch traverses a gap between prisms, interacting with evanescent waves generated via total internal reflection at the prism hypotenuse surfaces. The phase difference between two incident lasers is set as  $180^\circ$ , which causes the longitudinal acceleration electric fields ( $E_z$ ) along the axis to cancel each other out, while the transverse deflection electric fields ( $E_x$ ) are superimposed. Phase-matching between the electron velocity  $\beta_b$  and surface wave phase velocity  $\beta_p$  is achieved by optimizing the prism refractive index  $n$  and THz incidence angle  $\theta$ , satisfying  $\beta_b = \beta_p = (n \sin \theta)^{-1}$ . Here, the longitudinal center of the electron bunch remains aligned with the zero phase position of the surface wave, which can achieve the maximum deflecting gradient.

In order to fully understand the interaction between particles and deflection fields, we first define the input optical source. The incident THz pulses are modeled as single-cycle Gaussian waveform:

$$E(t) = E_0 \exp(-0.5((t - t_0)/\sigma)^2) \sin[\omega_0(t - t_0)]. \quad (1)$$

where  $E_0$  is the peak field,  $\sigma$  is the rms pulse duration,  $t_0$  the time delay, and  $\omega_0$  the central angular frequency. Figure. 2(a) shows the temporal profile of the THz pulse, with a pulse duration of 2 ps, while Fig. 2b shows its frequency spectrum centered at 0.25 THz (bandwidth: 0.22 THz).

The electron bunch with Gaussian distributions in both transverse and longitudinal directions is employed as the

\* sunli27@ustc.edu.cn

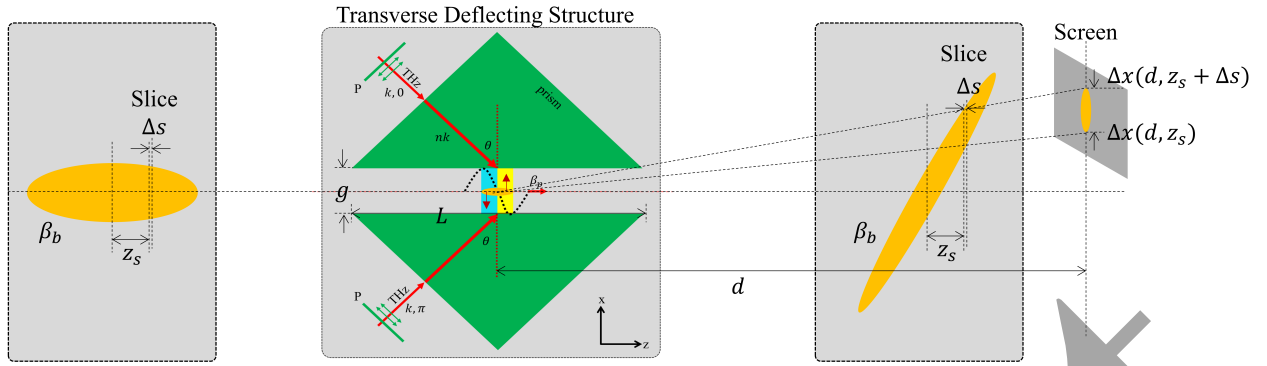


Figure 1: Schematic diagram of the proposed THz-driven electron bunch deflecting scheme. Key components include: (i) lithium niobate (LN) crystals for THz generation; (ii) symmetric silicon prisms with a  $300 \mu\text{m}$  bunch channel (iii)  $180^\circ$  phase-shifted, parallel-polarized (P) THz pulses. Here,  $k$  and  $nk$  denote the vacuum and dielectric wavenumbers, respectively.

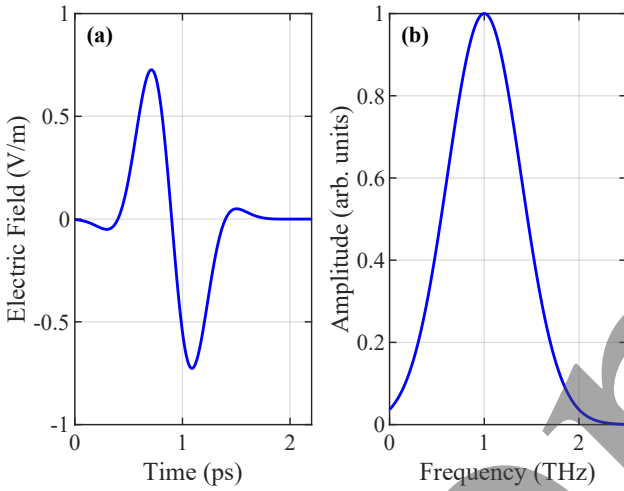


Figure 2: (a) THz pulse in the time domain and (b) Frequency spectrum used in simulations.

particle source. The electron bunch is characterized by an initial energy of  $E_{k0}$ , a charge of  $Q_0$ , a longitudinal length of  $\sigma_{t0}$ , a transverse size of  $\sigma_{x0}$ , and a normalized emittance of  $\epsilon_n$ . The parameters of the THz pulses used in simulations, together with the particle source, are given in Table 1.

## SIMULATION AND RESULT

The distribution of deflection field in the channel is calculated by FDTD algorithm. In the simulation, the transverse distribution of the THz pulse is set to be uniform, ensur-

Table 1: Driven optical source and particle source simulation parameters.

Physical Quantity	Symbol	Value	Unit
Central frequency	$f_0$	1	THz
Pulse duration	$\sigma_{t0}$	0.45	ps
bunch energy	$E_{k0}$	1	MeV
bunch charge	$Q_0$	1.6	fC
bunch length	$\sigma_{t0}$	70	fs
bunch size	$\sigma_{x0}$	10	$\mu\text{m}$
Normalized emittance	$\epsilon_n$	1	$\text{pm} \cdot \text{rad}$

ing the uniformity of the field distribution at different times during the propagation of the surface wave formed by total reflection.

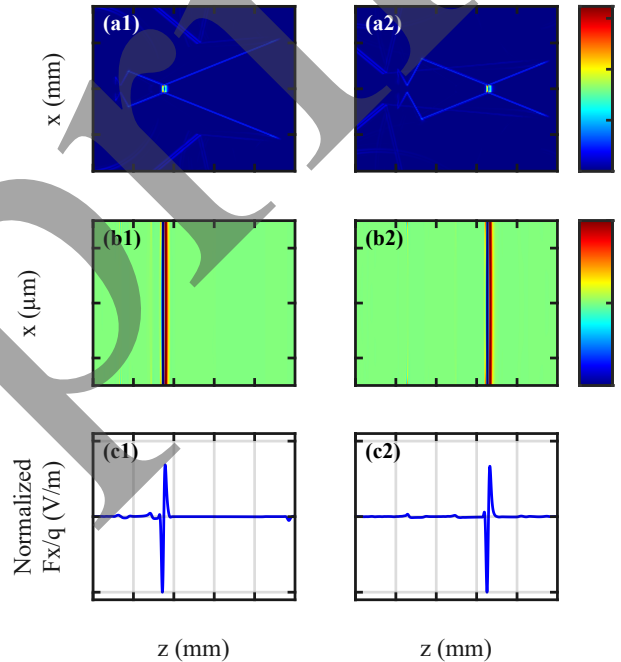


Figure 3: (a1, a2) Simulated snapshots of the laser pulse propagating in the channel at two moments. (b1, b2) Field maps of the  $E_x$  field in the bunch channels at two moments. (c1, c2) Distribution of  $F_x/q$  fields along the z-axis at two moments.

Figure 3 captures the THz pulse evolution at  $t_1 = 10.985$  ps and  $t_2 = 22.076$  ps. The electric field magnitude (Fig. 3a) exhibits confinement within the prism structure, while the transverse field  $E_x$  distributions (Fig. 3b) and deflection force  $F_x/q$  distributions along the z-axis (Fig. 3c) in the bunch channel demonstrate symmetric profiles, consistent with the  $180^\circ$  phase-shift design. From Fig. 3b, the deflecting force is symmetrically distributed on both sides of the z-axis, consistent with the theoretical analysis. From Fig. 3c, the THz pulse maintains  $>90\%$  of its initial amplitude

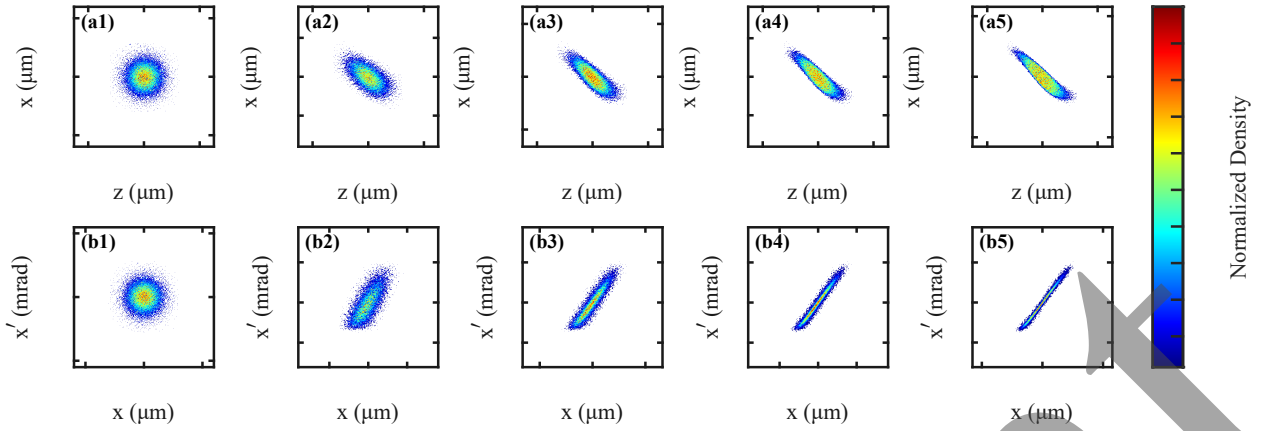


Figure 4: Simulated particles messages at five moments ( $t_1 = 0$ ,  $t_2 = 10.069$  ps,  $t_3 = 20.138$  ps,  $t_4 = 30.207$  ps,  $t_5 = 40.276$  ps) along the electron bunch channel. (a) The real space distributions in z-x plane. (b) The phase space distributions in x-x' plane.

over the 9.5 mm interaction length (Fig. 3c), with negligible dispersion induced broadening (<5% pulse width increase), ensuring sustained deflection efficiency. Phase velocity extraction from Fig. 3c yields  $\beta_p = 0.941$ , matching the 1 MeV bunch velocity  $\beta_b = 0.941$  within 0.1% error. The linear region ( $\lambda/4 \approx 300$  μm) around the zero-phase point enables uniform deflection for 60 μm bunch length.

Figure. 4 tracks the bunch's phase space evolution at five time slices. The longitudinal profile of the electron bunch is observed to exhibit negligible variation. Meanwhile, a progressive amplification of both the transverse distribution and the transverse component of momentum is noted. Initial transverse size ( $\sigma_{x0} = 10$  μm) expands to 76.66 μm after 85 ps of deflection, corresponding to a gradient of 1.5 MV/m, while longitudinal spread remains below 1.06% ( $\sigma_{z5} = 61.74$  μm). The linear relationship between transverse displacement and longitudinal position is confirmed (with  $R^2 = 0.97$  as shown in Fig. 4), indicating that the mapping from temporal profile ( $\sigma_{z0} = 60$  μm) to spatial distribution ( $\sigma_{x5} = 76.66$  μm) is direct. When the TDS is off, the bunch transverse size and longitudinal length is 11.03 μm and 59.40 μm, respectively. Under this condition, the temporal resolution of the THz-driven dielectric deflector can be estimated to  $\approx 16$  fs.

## CONCLUSION

In conclusion, we propose a particle deflecting scheme using a pair of single-cycle THz pulses to drive dielectric prisms via the Cherenkov effect. The electron bunch deflecting is obtained via maintaining synchrony between the center of the electron bunch and the zero-phase point of the surface wave. The bunch size that can be effectively deflected is directly proportional to the linear region of the surface wave, which is in turn proportional to the wavelength

of the incident laser. The deflecting gradient is related to the initial energy of the electron bunch and the intensity of the incident laser. This THz-driven dielectric particle deflector is significant not only for femtosecond-level bunch diagnostics but also spatiotemporal shaping of electron wavepackets, with wide applications in ultrafast electron diffraction and attosecond science.

## REFERENCES

- [1] L. Sun *et al.*, "GV m<sup>-1</sup> on-chip particle accelerator driven by few-cycle femtosecond laser pulse", *New Journal of Physics*, vol. 23, no. 6, p. 063031, Jun. 2021. doi:10.1088/1367-2630/ac03cf
- [2] E. Prat, A. Malyzhenkov, and P. Craievich, "Sub-femtosecond time-resolved measurements of electron bunches with a c-band radio-frequency deflector in x-ray free-electron lasers", *Review of Scientific Instruments*, vol. 94, no. 4, p. 043103, Apr. 2023. doi:10.1063/5.0144876
- [3] B. Marchetti *et al.*, "Experimental demonstration of novel beam characterization using a polarizable x-band transverse deflection structure", *Scientific Reports*, vol. 11, no. 1, p. 3560, Feb. 2021. doi:10.1038/s41598-021-82687-2
- [4] P. Craievich *et al.*, "Novel X-band transverse deflection structure with variable polarization", *Phys. Rev. Accel. Beams*, vol. 23, no. 11, p. 112001, Nov. 2020. doi:10.1103/PhysRevAccelBeams.23.112001
- [5] S. P. Jamison *et al.*, "Thz-driven acceleration and manipulation of electron beams", in *2023 48th International Conference on Infrared, Millimeter, and Terahertz Waves (IRMMW-THz)*, pp. 1-4, 2023. doi:10.1109/IRMMW-THz57677.2023.10298932
- [6] L. Zhao *et al.*, "Terahertz oscilloscope for recording time information of ultrashort electron beams", *Phys. Rev. Lett.*, vol. 122, no. 14, p. 144801, Apr. 2019. doi:10.1103/PhysRevLett.122.144801